

**AGENDA
CITY OF SWARTZ CREEK
ZONING BOARD OF APPEALS
WEDNESDAY, MAY 19, 2021
6:00 P.M.**

- 1. CALL TO ORDER:**
- 2. PLEDGE OF ALLEGIANCE:**
- 3. ROLL CALL:** Commissioners: Packer, Plumb, Gilbert, Smith, Wyatt.
Alternates: Cramer, Hicks
- 4. APPROVAL OF AGENDA:**
- 5. APPROVAL OF MINUTES:**
- 6. CORRESPONDENCE:**

	Page
A. Resolutions	02
B. Virtual Meeting Instructions & Policy	05
C. Minutes of January 20, 2021	10
D. Meeting Staff Letter	13
E. Variance Application Materials	17
F. ZBA Bylaws and Handbook	22
- 7. MEETING OPENED TO THE PUBLIC:**
- 8. VARIANCE APPLICATION:**
 - A. 58-35-551-008; 8522 Miller Road (LED Sign)
- 9. OTHER BUSINESS:**
 - A. Election of Officers
- 9. MEETING OPENED TO THE PUBLIC:**
- 10. ADJOURNMENT:**

**RESOLUTIONS
CITY OF SWARTZ CREEK
ZONING BOARD OF APPEALS
WEDNESDAY, MAY 19, 2021
6:00 P.M.**

Resolution No. 210519-01 **Approval of Agenda**

Motion by Boardmember _____, the Swartz Creek Zoning Board of Appeals approves the agenda for the May 19, 2021 ZBA meeting.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-02 **Approval of Minutes**

Motion by Boardmember _____, the Swartz Creek Zoning Board of Appeals approves the minutes for the January 20, 2021 ZBA meeting.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-03 **Selection of Chairperson**

Motion by Zoning Board of Appeals Board Member: _____

I Move, the Swartz Creek Zoning Board of Appeals selects Board Member _____ to serve as the ZBA Chairperson for a twelve month period commencing immediately and ending at the next annual meeting or as stated in the bylaws.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-04 **Selection of Vice Chairperson**

Motion by Zoning Board of Appeals Board Member: _____

I Move, the Swartz Creek Zoning Board of Appeals selects Board Member _____ to serve as the ZBA Vice-Chairperson for a twelve month period commencing immediately and ending at the next annual meeting or as stated in the bylaws.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-05

Selection of Secretary

Motion by Zoning Board of Appeals Board Member: _____

I Move, the Swartz Creek Zoning Board of Appeals selects Board Member _____ to serve as the ZBA Secretary for a twelve month period commencing immediately and ending at the next annual meeting or as stated in the bylaws.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-06

Sign Variance Findings

Motion by Boardmember _____, the Swartz Creek Zoning Board of Appeals makes the following findings in relation to the variance application for 8048 Miller Road:

1. The site presents the following unique circumstances:
 - a. Numerous business entrances and fronts that are perpendicular to the street.
 - b.
2. The site presents the following undue hardships:
 - a. Existence of a masonry wall that limits visibility behind the right of way.
 - b.
3. The monument sign is replacing a pre-existing monument sign of similar proportions that was removed during the 2019 streetscape project.
4. The variance request otherwise meets expectations for a sign variance as enumerated in Zoning Appendix A Section 14.11.
5. _____
6. _____

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-07

Sign Variance Decision

Motion by Boardmember _____, the Swartz Creek Zoning Board of Appeals approves/denies the variance request for a ground sign, as applied for at the site known as 8048 Miller Road with the following conditions:

1. The sign is approved to serve parcels 58-35-576-039 & 58-35-576-040, commonly referred to as 8048 Miller Road.
2. _____
3. _____

Second by Board Member: _____

Voting For: _____

Voting Against: _____

Resolution No. 210519-08

Motion by Boardmember _____, the Swartz Creek Zoning Board of Appeals adjourns the May 19, 2021 Zoning Board of Appeals meeting.

Second by Board Member: _____

Voting For: _____

Voting Against: _____

**CITY OF SWARTZ CREEK
VIRTUAL ZONING BOARD OF APPEALS MEETING
ACCESS INSTRUCTIONS
TUESDAY, MAY 19, 2021 7:00 P.M.**

The ZBA meeting of May 19, 2021 at 6:00 p.m. will be conducted as a hybrid meeting, with commissioners, staff, consultants, petitioners, and public attending in-person. The meeting will also be held virtually (online and/or by phone) to non-commissioners, due to health concerns surrounding Coronavirus/COVID-19.

To comply with the **Americans with Disabilities Act (ADA)**, any citizen requesting accommodation to attend this meeting, and/or to obtain the notice in alternate formats, please contact Connie Olger, 810-429-2766 48 hours prior to meeting,

Zoom Instructions for Participants

To join the conference by phone:

1. On your phone, dial the teleconferencing number provided below.
2. Enter the **Meeting ID** number (also provided below) when prompted using your touch-tone (DTMF) keypad.

Before a videoconference:

1. You will need a computer, tablet, or smartphone with speaker or headphones. You will have the opportunity to check your audio immediately upon joining a meeting.
2. Details, phone numbers, and links to videoconference or conference call is provide below. The details include a link to “**Join via computer**” as well as phone numbers for a conference call option. It will also include the 9-digit Meeting ID.

To join the videoconference:

1. At the start time of your meeting, enter the link to join via computer. You may be instructed to download the Zoom application.
2. You have an opportunity to test your audio at this point by clicking on “Test Computer Audio.” Once you are satisfied that your audio works, click on “Join audio by computer.”

You may also join a meeting without the link by going to join.zoom.us on any browser and entering the Meeting ID provided below.

If you are having trouble hearing the meeting, you can join via telephone while remaining on the video conference:

1. On your phone, dial the teleconferencing number provided below.
2. Enter the **Meeting ID number** (also provided below) when prompted using your touchtone (DMTF) keypad.
3. If you have already joined the meeting via computer, you will have the option to enter your participant ID to be associated with your computer.

Participant controls in the lower left corner of the Zoom screen:



Using the icons in the lower left corner of the Zoom screen you can:

- Mute/Unmute your microphone (far left)
- Turn on/off camera (“Start/Stop Video”)
- Invite other participants
- View participant list-opens a pop-out screen that includes a “Raise Hand” icon that you may use to raise a virtual hand during Call to the Public
- Change your screen name that is seen in the participant list and video window
- Share your screen

Somewhere (usually upper right corner on your computer screen) on your Zoom screen you will also see a choice to toggle between “speaker” and “gallery” view. “Speaker view” show the active speaker.

Topic: City of Swartz Creek Zoning Board of Appeals
Time: May 19, 2021 06:00 PM Eastern Time (US and Canada)

Join Zoom Meeting

<https://us02web.zoom.us/j/5699610014>

Meeting ID: 569 961 0014

One tap mobile

+13126266799,,5699610014# US (Chicago)

+19292056099,,5699610014# US (New York)

Dial by your location

+1 312 626 6799 US (Chicago)

+1 929 205 6099 US (New York)

+1 301 715 8592 US (Washington DC)

+1 346 248 7799 US (Houston)

+1 669 900 6833 US (San Jose)

+1 253 215 8782 US (Tacoma)

Meeting ID: 569 961 0014

Dial your local number: <https://us02web.zoom.us/j/5699610014>

If you have any further questions or concern, please contact 810-429-2766 or email colger@cityofswartzcreek.org. A copy of this notice will be posted at City Hall, 8083 Civic Drive, Swartz Creek, Michigan.

+

CITY OF SWARTZ CREEK
VIRTUAL (ELECTRONIC) MEETING RULES AND PROCEDURES

In order to conduct an effective, open, accessible, and professional meeting, the following protocols shall apply. These protocols are derived from the standard practices of Swartz Creek public meetings, Roberts Rules of Order, and city board & commission procedures. These procedures are adopted to govern participation by staff, councilpersons and members of the public in all City meetings held electronically pursuant to PA 228 of 2020. Note that these protocols do not replace or eliminate established procedures or practices. Their purpose is to augment standing expectations so that practices can be adapted to a virtual meeting format.

The following shall apply to virtual meetings of the city’s public bodies that are held in accordance with the Open Meetings Act.

1. Meetings of the City Council, Planning Commission, Zoning Board of Appeals, Downtown Development Authority, Park Board, or committees thereunder may meet electronically or permit electronic participation in such meetings insofar as (1) the Michigan Department of Health and Human Services restricts the number of persons who can gather indoors due to the COVID-19 pandemic; (2) persons have an illness, injury, disability or other health-related condition that poses a risk to the personal health or safety of members of the public or the public body if they were to participate in person; or (3) there is in place a statewide or local state of emergency or state of disaster declared pursuant to law or charter by the governor or other person authorized to declare a state of emergency or disaster.
2. All meetings held hereunder must provide for two-way communication so that members of the public body can hear and respond to members of the general public, and vice versa.
3. Members of the public body who participate remotely must announce at the outset of the meeting that he/she is in fact attending the meeting remotely and by further identifying the specific physical location (by county, township, village and state) where he/she is located. The meeting minutes must include this information.
4. Notice of any meeting held electronically must be posted at the City Offices at least 18 hours before the meeting begins and must clearly explain the following:
 - (a) why the public body is meeting electronically;
 - (b) how members of the public may participate in the meeting electronically, including the specific telephone number, internet address or similar log-in information needed to participate in the meeting;
 - (c) how members of the public may contact members of the public body to provide input or ask questions on any business that will come before the public body at the meeting;
 - (d) how persons with disabilities may participate in the meeting.
5. The notice identified above must also be posted on the City’s website homepage or on a separate webpage dedicated to public notices for non-regularly scheduled or electronic public meetings that is accessible through a prominent and conspicuous link on the website’s homepage that clearly describes the meeting’s purpose.

6. The City must also post on the City website an agenda of the meeting at least 2 hours before the meeting begins.
7. Members of the public may offer comment only when the Chair recognizes them and under rules established by the City.
8. Members of the public who participate in a meeting held electronically may be excluded from participation in a closed session that is convened and held in compliance with the Open Meetings Act.

MAINTAINING ORDER

Public body members and all individuals participating shall preserve order and shall do nothing to interrupt or delay the proceedings of public body.

All speakers shall identify themselves prior to each comment that follows another speaker, and they shall also indicate termination of their comment. For example, "Adam Zettel speaking. There were no new water main breaks to report last month. That is all."

Any participants found to disrupt a meeting shall be promptly removed by the city clerk or by order of the Mayor. Profanity in visual or auditory form is prohibited.

The public body members, participating staff, and recognized staff/consultants/presenters shall be the only participants not muted by default. All other members must request to speak by raising their digital hand on the Zoom application or by dialing *9 on their phone.

MOTIONS & RESOLUTIONS

All Motions and Resolutions, whenever possible, shall be pre-written and in the positive, meaning yes is approved and no is defeated. All motions shall require support. A public body member whom reads/moves for a motion may oppose, argue against or vote no on the motion.

PUBLIC ADDRESS OF BOARD OR Commission

The public shall be allowed to address a public body under the following conditions:

1. Each person who wishes to address the public body will be first recognized by the Mayor or Chair and requested to state his / her name and address. This applies to staff, petitioners, consultants, and similar participants.
2. Individuals shall seek to be recognized by raising their digital hand as appropriate on the digital application.
3. Petitioners are encouraged to appropriately identify their digital presence so they can be easily recognized during business. If you intend to call in only, please notify the clerk in advance of your phone number.
4. The city clerk shall unmute participants and the members of the public based upon the direction of the mayor or chair. Participants not recognized for this purpose shall be muted by default, including staff, petitioners, and consultants.
5. Individuals shall be allowed five (5) minutes to address the public body, unless special permission is otherwise requested and granted by the Mayor or Chair.
6. There shall be no questioning of speakers by the audience; however, the public body, upon recognition of the Mayor or Chair, may question the speaker.

7. No one shall be allowed to address the public body more than once unless special permission is requested, and granted by the Mayor or Chair.
8. One spokesperson for a group attending together will be allowed five (5) minutes to address the public body unless special permission has been requested, and granted by the Mayor or Chair.
9. Those addressing the public body shall refrain from being repetitive of information already presented.
10. All comments and / or questions shall be directed to and through the Mayor or Chair.
11. Public comments (those not on the agenda as speakers, petitioners, staff, and consultants) are reserved for the two "Public Comment" sections of the agenda and public hearings.

VOTING RECORD OF PUBLIC BODIES

All motions, ordinances, and resolutions shall be taken by "YES" and "NO" voice vote and the vote of each member entered upon the journal.

**CITY OF SWARTZ CREEK
SWARTZ CREEK, MICHIGAN
MINUTES OF THE VIRTUAL ZONING BOARD OF APPEALS
JANUARY 20, 2021**

The Regular Meeting was called to order at 6:00 pm by Secretary Smith in the Swartz Creek City Council Chambers, 8083 Civic Drive.

Board members Present: Cramer, Gilbert, Smith.

Alternates Present: Hicks (Participating).

Board members Absent Wyatt, Packer & Plumb.

Staff Present: Adam Zettel.

Others Present: Nate Henry & Kevin Holt.

APPROVAL OF AGENDA

Resolution No. 210120-01

(Carried)

Motion by Board Member Gilbert
Second by Board Member Cramer

The Swartz Creek City Zoning Board of Appeals hereby approves the Agenda of the Regular Board Meeting of January 20, 2021 as printed.

Yes: Cramer, Gilbert, Smith, Hicks.
No: None. Motion declared carried.

APPROVAL OF MINUTES:

Resolution No. 210120-02

(Carried)

Motion by Board Member Smith
Second by Board Member Gilbert

The Swartz Creek City Zoning Board of Appeals hereby approves the Minutes of the Regular Board Meeting September 16, 2020 to be approved.

Yes: Cramer, Gilbert, Smith, Hicks.
No: None. Motion declared carried.

Meeting Open To The Public: No comments.

Variance Application: 58-35-551-008; 8522 Miller Road (LED Sign).

Kevin Holt, Sign Tech., sign contractor who installed the sign is here tonight to see the process through and answer question in any way he can.

Mr. Zettel explained that the LED lights that were installed are supposed to be placed on ground signs only and not larger than 50 percent of the sign area. Due to the unique piece of property they didn't feel they can have a ground sign so it was put on the building. The owner doesn't feel the site is conducive to do a ground sign.

Board Member Cramer noted the sign is 50 percent less than the area of the wall. In his opinion the sign goes with the land it was not a distraction to him.

Board Member Smith commented the sign looks nice and from his perspective it improves the building and frees up the ingress and egress area.

Board Member Gilbert he thinks the sign looks good.

Mr. Zettel feels that this is a relatively unique piece of property and he doesn't see any red flags or have any objections.

Public Hearing

Open: 6:17 p.m.

Nate Henry wondered if the variance applied for is only for the sign or also for variance for more than one color on the screen at once or different lumen levels during day and night

Mr. Zettel responded those are performance standards and no variances are being sought for the operational parameters.

Board Member Smith commented that there is an ordinance for how bright it can be.

Closed: 6:19 p.m.

Resolution No. 210120-03

(Carried)

Motion by Board Member Cramer, support by Board Member Gilbert, the Swartz Creek Zoning Board of Appeals makes the following findings in relation to the variance application for 8522 Miller Road:

1. The site presents the following unique circumstances: sign is less than 50 percent of the area of the wall, very congested area, fits the lay of the land.
2. The LED is replacing a pre-existing wall sign.
3. The petitioner acknowledges that a ground sign is not practical.

4. The variance request otherwise meets expectations for a sign variance as enumerated in Zoning Appendix A Section 14.11.

YES: Gilbert, Smith, Hicks, Cramer.
NO: None. Motion declared carried.

Resolution No. 210120-04

(Carried)

Motion by Board Member Gilbert, support by Board Member Cramer, the Swartz Creek Zoning Board of Appeals approves the variance request for an wall mounted, 100% LED changeable message sign for 8522 Miller Road with the following conditions:

1. The site shall forfeit all ground sign rights.
2. Business to adhere to operational guidelines.

YES: Gilbert, Smith, Hicks, Cramer.
NO: None. Motion carried.

OTHER BUSINESS: None.

Meeting Open To The Public: No comments.

Adjourn

Resolution No. 210120-05

(Carried)

Motion by Board Member Gilbert
Second by Board Member Cramer

I Move the Swartz Creek Zoning Board of Appeals adjourns the January 20, 2021 ZBA meeting.

YES: Smith, Hicks, Cramer, Gilbert.
NO: None. Motion carried.

The meeting adjourned at approximately 6:26 p.m.

Ronald Smith
Secretary

Date: May 11, 2021

To: Zoning Board of Appeals Commissioners
From: Adam Zettel, AICP
Subject: May 19, 2021 ZBA Meeting

Hello everyone,

The Zoning Board of Appeals shall convene at 6:00pm on Wednesday, May 19, 2021 in the city council chambers. This will be an in-person meeting for ZBA members. The meeting will also be available to the public via Zoom. The instructions are attached.

This meeting will function as our annual meeting. Note that, due to COVID, our last annual meeting was in of September 2020. Be that as it may, we are due again! We will be selecting officers. Current officers are Packer (Chair), Plumb (Vice Chair), and Smith (Secretary). I am including the ZBA handbook and by-laws. Please take a look.

The other purpose of this meeting is to hear a variance proposal related to a LED ground sign located at 8048 Miller Road. Enclosed, you will find the variance application materials. Also, please join Mr. Cramer to the ZBA! He replaces Mrs. Fountain. **Please read and study all materials carefully!**

Please see the plans for the sign variance details. The site is technical comprised of two lots. The zoning is Central Business District, and the property contains a two-story mixed use building with eight commercial tenants and multiple apartments. The site is in the downtown area and has parking, drive access, and is fronted by the public masonry knee wall.

Note that the owner indicated a willingness to have ZBA members visit the site if they so choose to. If you intend to do so, please be courteous and identify yourself prior to observing the site.

The petitioner has included the sign proposal and an application, which I have included in the packet.

The ground sign replaces a former ground sign of similar size that was located in front of the Great Lakes Smoothie Company. This was removed in 2019 as part of a cooperative project with the city to install the masonry wall and outdoor patio.

The proposed sign does not comply with the ordinance and seeks variances for the following:

1. Table 14.1 indicates that ground signs are not permitted in the Central Business District. The proposed sign is a ground sign.
2. Table 14.1 indicates that permitted ground signs are limited to 6' of height. The proposed sign is a 10' ground sign.
3. Table 14.1 indicates that signs must be located at least 15' from the right-of-way line. The proposed sign 4' from the right-of-way line.

Note that the table footnotes contain the following language:

“For multiple-tenant commercial or shopping center signs, a main identification sign with the name of the center only may be permitted not to exceed 40 square feet per sign face (80 square feet total area) and ten feet in height.”

The petitioner’s proposal is reviewed as follows, under ordinance section 21.11:

A. Variances may be granted for any **one** of the following conditions:

1. The applicant has demonstrated a variance is needed due to a practical difficulty on the site, such as varied topography, horizontal or vertical road curvature, or presence of structures or desired trees that limit visibility of a sign on the premises compared to similar sites with conforming signs in the same zoning district;

The petitioner indicates that a ground sign is needed to provide identification of the plaza and businesses (via the LED) because there are eight commercial units in the building, and only a couple are visible to the street front or east bound traffic. The difficulty stems from the orientation of the building, in which the units are arrayed perpendicular to the road. This is exacerbated by the limited visibility onto the site due to the masonry wall and the lack of a building setback.

2. A variance is warranted due to the relatively large size of the site, frontage or building in comparison to other establishments in the same zoning district;

The building is unique in the CBD due to its perpendicular orientation and large size.

3. A variance would significantly improve the conformity of an existing sign.

The pre-existing sign was approximately the same size, but it was constructed out of less durable materials (wood) and was centered in front of the building.

The owner voluntarily removed this at the request of the city to enable the streetscape project/dining area improvement (which the owner provided).

Summary. This site definitely has some practical difficulties that are not apparent with other properties or the result of the owner actions.

B. To grant a variance for one of the conditions specified above, **all** of the following standards must also be met:

1. The inability to conform with the requirements of this Article is due to a hardship or practical difficulty that includes more than mere inconvenience or mere inability to attain a supposed higher financial return;

Business identification in some form is a clear expectation of the ordinance. The current circumstances make such identification to traffic very problematic with strict conformance to the ordinance.

2. That the alleged hardships or practical difficulties, or both, are exceptional and peculiar to the property of the person who requested the variance, and result from conditions which do not exist generally throughout the city;

Staff finds the size, orientation, and location of the building on this property to be exceptional and peculiar, possibly unique.

3. That allowing the variance will result in substantial justice being done, considering the public benefits intended to be secured by this Ordinance, the individual hardships that will be suffered by a failure of the Zoning Board of Appeals to grant a variance, and the rights of others whose property would be affected by the allowance of the variance, and will not be contrary to the public purpose and general intent of this Article; and

This is subjective, but staff has no findings to indicate the variance will be contrary to the public purpose or general intent of the Article.

4. The variance granted is the minimum necessary to allow the applicant to enjoy the same rights as other establishments in the same zoning district, have a reasonable outlet for free speech and meet the intent of this Article;

Because the provision for a multi-tenant sign enables a 10' sign height on a ground sign, the proposal seems reasonable to staff in terms of the sign composition and size. The reduced distance from the right-of-way is a variance that will enable better visibility, given the lack of setbacks for the primary building and the business to the east. To the extent that the setback is reduced, if at all, is up to the ZBA.

5. The variance will not adversely affect the health, safety and welfare of the public.

No adverse findings by staff.

Summary Findings

This property is certainly unique and presents some hardships. The hardships are certainly not the fault of the owner. If anything, the removal of the former ground sign and provision of easements for the masonry wall is an indication of the owner's willingness to work to improve the function of the property in the downtown. The degree to which the ZBA finds that the hardships warrant the variances, is up to the board. Even if one or more of the variances is found to be warranted, the degree of variance is up for discussion (how tall? How far from the right-of-way?). Staff supports the sign as proposed under the current circumstances.

Note that resolutions are ALWAYS originally written in the affirmative. Resolutions can be denied, altered, affirmed, or completely re-written based upon the findings and needs of the ZBA.

If you have any questions or have comments, please contact the city office or send me an email. I shall see you at the meeting.

Sincerely,

A handwritten signature in blue ink that reads "Adam Zettel". The signature is fluid and cursive.

Adam H. Zettel, AICP
City Manager
City of Swartz Creek



APPLICATION FOR VARIANCE
City of Swartz Creek
8083 Civic Drive
Swartz Creek, MI 48473
810-635-4464

Fee Received: 250 Date: 4/15/21 Receipt No: 249108

NOTICE TO APPLICANT:

This application for Variance must be filed approximately twenty (20) days before a meeting may be scheduled.

The property sought to be used as a "Special Use" is located and described, as follows:
Assessment Roll Description No. 58- 35-576-029,
centerpiece plaza (8048 miller rd Swartz Creek Mi.)

It has a frontage of: 92 feet and a depth of: 311 feet.

PRESENT ZONING:

TO THE ZONING BOARD OF APPEALS:

I, (We), the undersigned, do hereby respectfully make application for a Variance, for the following reason:

Centerpiece Plaza has 8 commercial units with only 1 being seen from traffic, tenants need a sign to survive as a small business.

PROPERTY SOUGHT FOR VARIANCE IS OWNED BY:

Name: Richard J Ryan jr


Address: 8048 miller rd Swartz creek

Phone Number: 610 288-0052

CRUCIAL POINTS OF VARIANCE: (All elements must be present)

- A. Undue Hardship
- B. Unique Circumstances

Attached hereto are two (2) prints of the subject property plot plan showing the lot or parcel location within the City. These prints are made a part of this petition and are drawn to scale showing the existing and proposed structures.



Signature of Applicant

Address: 8048 Miller Rd Swartz Creek

Phone Number: (810)288-0052

Email Address: ryanstrongcafe@gmail.com

A. Action Taken by the Zoning Board of Appeals:

- 1. Date application: ___/___/___
- 2. Date of Public Hearing: ___/___/___
- 3. Findings of Zoning Board of Appeals:


B. Final Disposition of Zoning Board of Appeals:

By: _____
Chairman

Secretary

8048 Miller



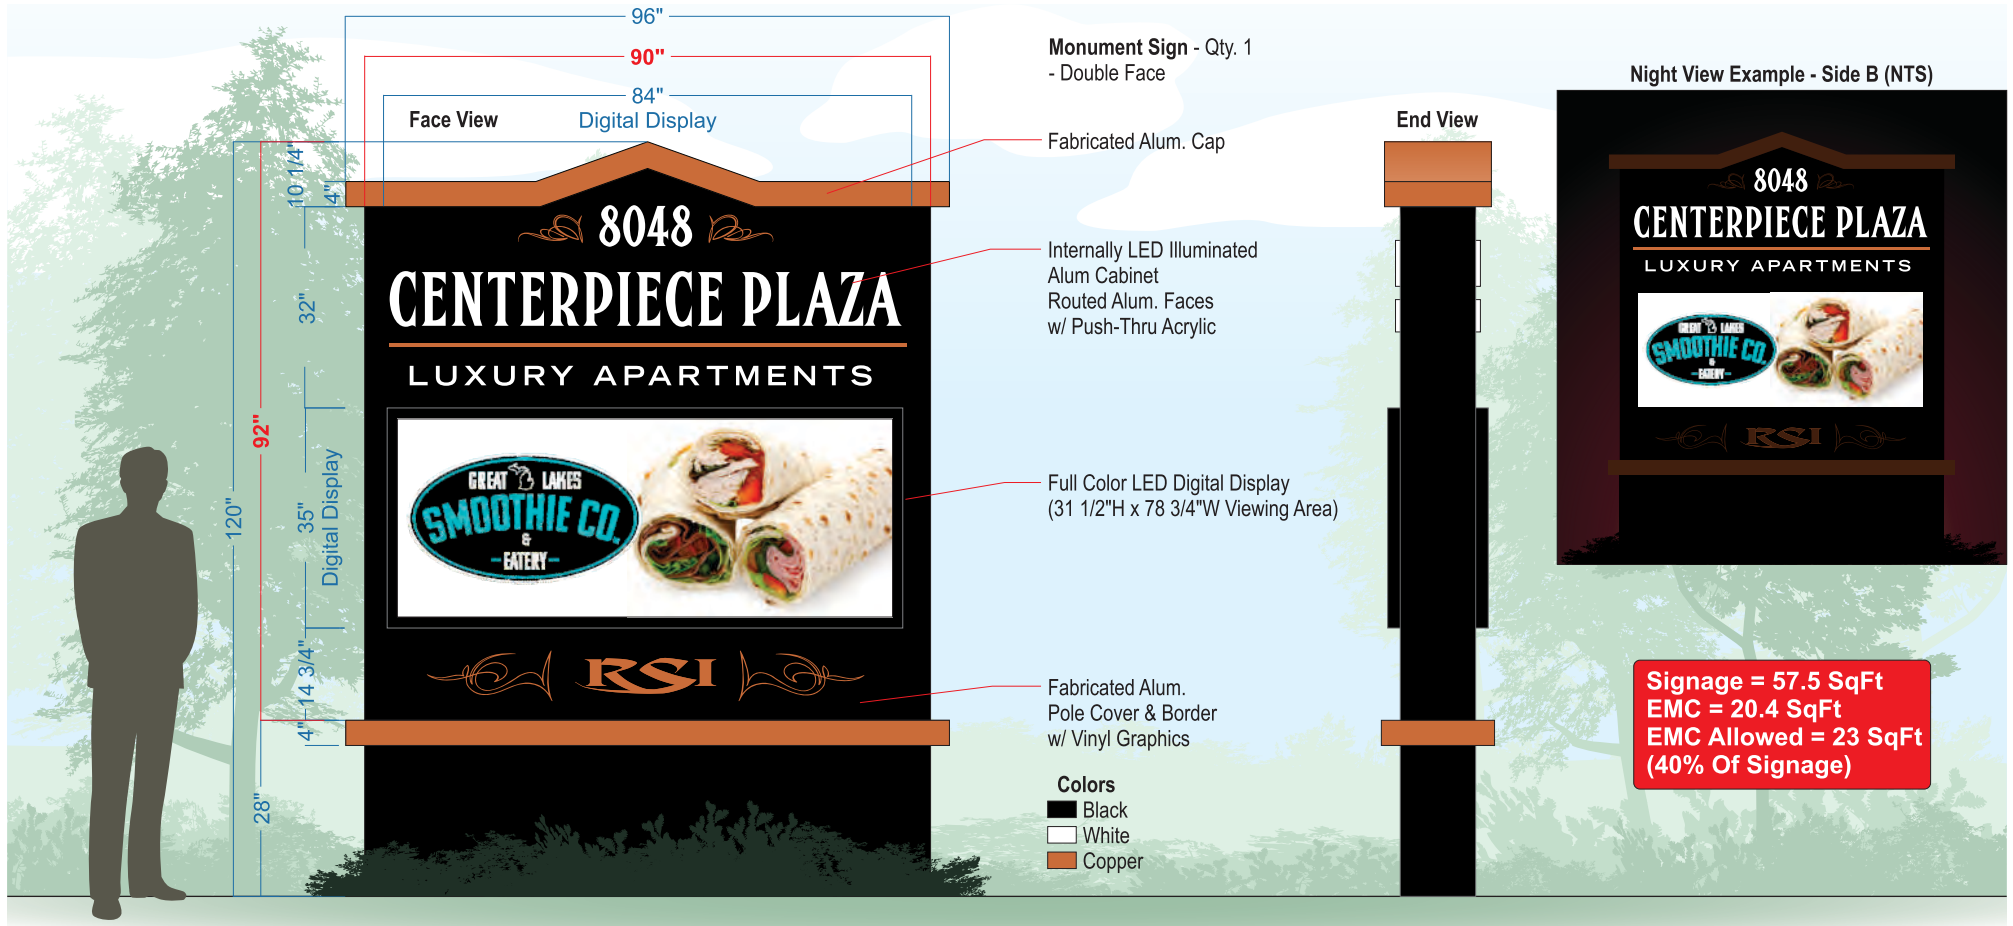

Proposed Sign Location



* Landscaping By Others, Conceptual Only

Existing Area



Existing Building



X
 Signature for approval of artwork - Proceed to production as shown



4145 Market Place
 Flint, Michigan 48507
 810-487-0000
 www.SignsByCrannie.com

Customer: Centerpiece Plaza
Address: 8048 Miller Rd
 Swartz Creek, MI 20

Salesperson: Nick Trifon
Date: 3-30-21
D-T: X
Scale: 3/8"=1'-0"

Filename: CenterpiecePlaza-Pylon Sign
Drawn By: G.Alumbaugh
Revision: GA 4-1-21 GA 4-7-21 GA 4-8-21 May 19, 2021

**CITY OF SWARTZ CREEK
SWARTZ CREEK, MICHIGAN
NOTICE OF PUBLIC HEARING
ZONING BOARD OF APPEALS**

DATE – TIME: Wednesday, May 19, 2021 at 6:00 p.m.

PLACE OF HEARING: City Hall, 8083 Civic Dr., Swartz Creek, MI 48473

APPLICANT: Richard J Ryan Jr.

PROPERTY LOCATION: 8048 Miller Rd., Swartz Creek, MI 48473,
Commonly known as Centerpiece Plaza, the old MacGilverly Dealership,
or the Great Lakes Smoothie Building

PROPERTY OWNERS: Richard J Ryan Jr.

LEGAL DESCRIPTION: Tax ID No. 58-35-576-039 & 58-35-576-040

APPLICABLE SECTIONS: Zoning - Section 14.11 & Section 14.14

PURPOSE: Notice is hereby given that a public hearing will be held for the purpose of hearing all persons interested in a sign variance application to permit location, area, and type deviations for a ground sign on commercial property in the Central Business District.

The applicant seeks to place a ground sign on the site (not permitted in CBD, with a height of 10' (6' is maximum), and is closer than 15 feet to the right-of-way.

Written comments may be submitted to the City Clerk's office prior to the public hearing.

James Packer, Chairperson
Zoning Board of Appeals

Adam Zettel
City Manager
City of Swartz Creek

"AN EQUAL OPPORTUNITY EMPLOYER"

PUBLISH: Thursday, April 29, 2021
THE VIEW
PROOF REQUIRED

Please send billing to: City of Swartz Creek
8083 Civic Dr.
Swartz Creek MI 48473

City of Swartz Creek
**ZONING BOARD OF APPEALS
RULES OF PROCEDURE**

1. AUTHORITY

These rules of procedures are adopted by the City of Swartz Creek Zoning Board of Appeals, herein referred to as the ZBA, pursuant to Public Act 110 of 2006, as amended, the Michigan Zoning Enabling Act and Public Act 267 of 1976, as amended, the Open Meetings Act.

2. OFFICERS

2.1 Selection. At the March meeting, the ZBA shall select from its membership a chairperson, vice-chairperson, and secretary who shall serve for a twelve month period and who shall be eligible for reelection. Officers shall assume their respective officers and duties immediately.

2.2 Duties. A chairperson shall preside at all meetings and shall conduct all meetings in accordance with the rules provided herein. The vice-chairperson shall act in the capacity of the chairperson in the absence of the chairperson and shall succeed to the office of chairperson in the event of a vacancy in that office, in which case the ZBA shall select a successor to the office of vice-chairperson at the earliest practicable time. The secretary shall be responsible for signing the official minutes of the meeting. An individual other than a Planning ZBA member shall be appointed the recording secretary by the City Council and shall be responsible for the preparation of minutes, keeping pertinent public records, delivering communications, petitions, reports, and related items of business of the Commission, issuing notices of public hearings, and performing related administrative duties to assure efficient and informed ZBA operations. In the event the secretary is absent, the chairperson or acting chairperson shall appoint a temporary secretary for such meeting.

2.3 Tenure. The officers shall take office at the meeting at which they are elected. They shall hold their office for a term of one year beginning at the annual meeting in March, or their successors are elected and assume office.

3. MEETINGS

3.1 Meeting Notices. All meetings shall be posted at the City of Swartz Creek City Offices according to the Open Meetings Act. The notice shall include the date and time of the meeting.

3.2 Annual Meeting. The ZBA shall meet every March to select officers and see to any other business. This meeting shall be held at a date and time conducive to a regular meeting.

CITY OF SWARTZ CREEK, MICHIGAN
ZONING BOARD OF APPEALS – RULES OF PROCEDURE: MARCH 2009

- 3.3 Regular Meeting.** Regular meetings of the ZBA shall be held as needed, on the third Wednesday of the month in the City Hall Council Chambers at 8083 Civic Drive. The need for a meeting shall be based upon the submission of an application for an appeal, variance, or interpretation; or by the initiation by the Chairperson or City staff. The specific dates and times shall be posted at City Hall and a notice should be published in accordance with the Open Meetings Act. Any changes in the date or time of a regular meeting shall be posted within 3 days after the meeting at which the change is made. When a regular meeting date falls on or near a legal holiday, the ZBA shall select suitable alternate dates in the same month, in accordance with the Open Meetings Act.
- 3.4 Special Meetings.** A special meeting may be called by two members of the ZBA upon written request to the Secretary or by the Chairperson. The business which the ZBA may perform shall be conducted at a public meeting of the ZBA held in compliance with the Open Meetings Act. Public notice of the time, date, and place of the special meeting shall be posted at least 18 hrs before the meeting and the Secretary shall ensure that written notice of a special meeting is provided to ZBA members not less than 48 hours in advance of the meeting.
- 3.5 Quorum.** In order for the ZBA to conduct business or take any official action, a quorum consisting of the majority of the members of the ZBA shall be present. When a quorum is not present, no official action, except for closing of the meeting may take place. The members of the ZBA may discuss matters of interest, but can take no action until the next regular or special meeting. All public hearings without a quorum shall be scheduled for the next regular or special meeting, and no additional public notice is required provided the date, time, and place is announced at the meeting.
- 3.6 Hearings.** Hearings shall be scheduled and due notice given in accordance with the provisions of the acts and ordinance cites in Section 1. Public hearings conducted by the ZBA shall be run in an orderly and timely fashion. This shall be accomplished by the following procedure:
- A. The public hearing will be opened.
 - B. Presentation by applicant.
 - C. Staff reports if any shall be presented.
 - D. The public shall be invited to speak on the matter. Each speaker will be asked to give their name and address for the record. Each speaker shall be limited to 5 minutes.
 - E. Following the presentation by applicant, the ZBA will question staff and the applicant.

CITY OF SWARTZ CREEK, MICHIGAN
ZONING BOARD OF APPEALS – RULES OF PROCEDURE: MARCH 2009

F. Following the public comment the ZBA will close the public hearing portion of the meeting. An affirmative motion shall be made on the matter and ZBA members will discuss the matter, and may ask questions of the staff, applicant, or members of the public, and take whatever action is appropriate.

3.7 **Motions.** If possible, motions in the form of a resolution shall be pre-typed in the affirmative and included as a supplement to the agenda. Motions shall be restated by the Chairperson before a vote is taken. The name of the maker and supporters of the motions shall be recorded.

3.8 **Voting.** An affirmative vote of the majority of the ZBA members present for the conduct of business shall be required for the approval of any requested action or motion placed before the ZBA. Voting shall ordinarily be voice vote for such items as approval of the minutes and approval of the agenda. However, roll call votes will be required for all votes related to a decision on a variance, interpretation, or appeal. Furthermore, a roll call can also be required if requested by any ZBA member or directed by the Chairperson. All members of the ZBA including the Chairperson shall vote on all matters, with their names called on a rotating basis so the person whose name was called first on a roll call vote will be called last next time and second to last the next, etc, etc.

A member may be excused from voting only if that person has a bona fide conflict of interest as recognized by the majority of the remaining members of the Commission. A member may request to be excused from voting. That request shall be made before the consideration of the matter. The member shall reveal the basis for the potential conflict and the remainder of the ZBA shall vote to find that is, or is not a conflict. A member may also request that the ZBA find by majority vote that another member has a conflict of interest and should be prohibited from voting.

A member of the zoning board of appeals who is also a member of the planning commission or the City Council shall not participate in a public hearing on or vote on the same matter that the member voted on as a member of the planning commission or the City Council. However, the member may consider and vote on other unrelated matters involving the same property. Any member abstaining from a vote shall not participate in the discussion of that item and shall leave the room while the issue is being discussed and voted on.

3.9 **Order of Business.** A written agenda for all regular meetings shall be prepared as follows:

- A. Call to Order
- B. Pledge of Allegiance
- C. Roll Call
- D. Approval of Agenda

CITY OF SWARTZ CREEK, MICHIGAN
ZONING BOARD OF APPEALS – RULES OF PROCEDURE: MARCH 2009

- E. Approval of Minutes
- F. Correspondence that is Relevant to the Agenda
- G. Public Comments and Communications Concerning Items Not on the Agenda. Each Speaker Will Be Limited To 5 Minutes.
- H. Variance, Interpretation, and Appeal Hearings
 - a. Applicant Presentation
 - b. Staff Presentation
 - c. Public Hearing
 - d. Discussion and Questions by ZBA
 - e. Motion
 - f. Discussion on Motion
 - g. Roll Call Vote
- I. Any other Business/on-going Business
- J. Public Comments and Communications Concerning Items Not on the Agenda. Each Speaker Will Be Limited To 5 Minutes.
- K. Boardmember Comments
- L. Adjournment

A written agenda for special meetings shall be prepared and followed; however, the form as enumerated above shall not be necessary.

3.10 Rules of Order. All meetings of the ZBA shall be conducted in accordance with generally accepted parliamentary procedure, as governed by “Robert’s Rules of Orders”.

3.11 Alternates. An alternate member may be called as specified in the zoning ordinance to serve as a member of the zoning board of appeals in the absence of a regular member if the regular member will be unable to attend 1 or more meetings. An alternate member may also be called to serve as a member for the purpose of reaching a decision on a case in which the member has abstained for reasons of conflict of interest. The alternate member appointed shall serve in the case until a final decision is made. An alternate member serving on the zoning board of appeals has the same voting rights as a regular member.

4. MINUTES

4.1 ZBA minutes shall be prepared by the Recording Secretary of the ZBA or designee. The minutes shall contain a brief synopsis of the meeting, including a complete restatement of all motions and recording of votes; complete statement of the conditions or recommendations made on any action; and recording of

CITY OF SWARTZ CREEK, MICHIGAN

ZONING BOARD OF APPEALS – RULES OF PROCEDURE: MARCH 2009

attendance. The minutes of a public hearing shall include an identification of each member of the public who spoke and a summary of their comments. All communications, actions, and resolutions shall be attached to the minutes. The official records shall be deposited with the City Clerk when they become available.

5. OPEN MEETINGS AND FREEDOM OF INFORMATION PROVISIONS

- 5.1 All meetings of the ZBA shall be opened to the public and held in a place available to the general public.
- 5.2 All deliberations and decisions of the ZBA shall be made at a meeting open to the public.
- 5.3 A person shall be permitted to address a hearing of the ZBA under the rules established in section 3.5, and to address the ZBA concerning non-hearing matters under the rules established in Section 3.8 to the extent that they are applicable.
- 5.4 A person shall not be excluded from a meeting of the ZBA except for breach of the peace, committed at the meeting.
- 5.5 All records, files, publications, correspondences, and other materials are available to the public for reading, copying, and other purposed as governed by the Freedom of Information Act.
- 5.6 All meetings shall be recorded using a audio cassette or similar medium if practical.

6. AMENDMENTS

These rules may be amended by the ZBA by a concurring vote pursuant to subsection 3.7, during any regular meeting, provided that all members have received an advanced copy of the proposed amendments at least 3 days prior to the meeting at which such amendments are to be considered.

THESE BY-LAWS AND RULES OF PROCEDURES ARE ADOPTED ON THE

18th March, 2009

Ron Smith
ZBA Secretary

Zoning Board of Appeals Handbook

Published by the Michigan Municipal League

Zoning Board of Appeals Handbook

Written by Steve Langworthy
LSL Planning
Community Planning Consultants

Printed March, 2000

Reprinted July 2006 with updates

ISBN 1-929923-02-3

About the Author:

Steve Langworthy is a partner in the firm of LSL Planning. His more than 25 years of planning experience includes six years as the Planning Director and Zoning Administrator for the City of Kentwood and extensive experience in a variety of communities as a consulting planner. Steve has authored numerous master plans, zoning ordinances and special studies for communities of all sizes and levels of government.

Steve has extensive experience as a lecturer. He has conducted hundreds of zoning seminars and training programs for local government clients, the Michigan Municipal League, the Michigan Townships Association, and the Michigan Society of Planning Officials. He authored the Planning Commissioners Handbook for the Michigan Municipal League and was a principal author of the ***Township Guide to Planning and Zoning***, published by the Michigan Townships Association.

Forward:

Along with the other appointed and elected municipal officials in your community, members of a zoning board of appeals accept responsibility to protect the personality and vitality of your community. To carry out their duties, these volunteers must digest a mountain of information and negotiate a maze of delicate situations.

This handbook was written to help new zoning board of appeals members understand the scope of their role and responsibilities, and to provide them with a basis of understanding in order to capably perform their duties within the law. Topics covered include: the role of the zoning board of appeals as a whole and the roles and responsibilities of individual members; an explanation of the Michigan Zoning Enabling Act; the ZBA's relationship to other municipal bodies and individuals; how to identify and handle conflicts of interest; how to interpret a zoning ordinance; types of variances; preparing for and conducting meetings; and guidelines for making tough decisions.

As the state association of cities and villages, the Michigan Municipal League is committed to providing a variety of educational resources for both elected and appointed municipal officials to assist them in doing their jobs. The League is a non-partisan, nonprofit association working through cooperative effort to strengthen the quality of municipal government and administration.

This handbook is the latest step in our continuing effort to help municipalities meet the daily challenges of governing. Our thanks go to community planning consultant Steve Langworthy of LSL Planning for developing this text. His knowledge, creativity, insight and patience are most appreciated. Contributing to the legal accuracy of this book were attorney Gerald A. Fisher of Kohl, Secrest, Wardle, Lynch, Clark & Hampton and League Associate General Counsel Sue Jeffers. The Information and Publications staff of the Michigan Municipal League added a measure of common sense and smooth flavor.

The Michigan Municipal League's goal is to produce publications that will help to make your job easier. We welcome suggestions for additions to this publication and your comments in regard to all of our publications. Let us know how we are doing and how we can be of further assistance!

Daniel P. Gilmartin
Executive Director

Introduction – The Job

Congratulations!

§ 1 Your appointment to the zoning board of appeals (ZBA) is one that carries a significant responsibility for protecting your community and its future.

This handbook will provide you with some hints about how to be an effective member of the zoning board of appeals. It will tell you about the laws and regulations governing zoning and provide information about some of the expectations and methods you may use to prepare, make and enforce your decisions.

During your term you will encounter a wide variety of zoning related problems. Knowing some of the intricacies of zoning is only a part of your responsibilities. You will also learn how to deal with people, both applicants and neighbors, with patience, tact and diplomacy. Knowing how to act in stressful circumstances is one of the most important parts of the job, and one that is best learned through experience. The *Zoning Board of Appeals Handbook* is your head start on learning how to deal with these difficult situations.

You are encouraged to seek other sources for learning about the technical details of zoning and related

topics. These, too, will be a significant part of your job as a member of the zoning board of appeals. The Michigan Municipal League can suggest a number of documents that can help you on your way, as well as an ongoing series of courses you may find helpful.

What's in a Name?

§ 2 Your zoning ordinance may have given a different name to your board than the zoning board of appeals, such as the Board of Appeals, Board of Zoning Appeals, Board of Appeals and Adjustment or some other similar name. In townships this should not be confused with the Zoning Commission, which is a derivative of a planning commission. Regardless of the name, the duties and authority of the ZBA are largely the same.

The Job

§ 3 The future of your community will be greatly affected by the decisions you make as a member of the zoning board of appeals. Few voluntary, non-elected appointments have the kind of power granted to the ZBA. This is because it is one of only a few bodies that can permit someone to legally avoid compliance with an adopted ordinance. The exercise of this power is restricted by standards

discussed in greater detail below that are to be applied in decision making.

It Begins with a Philosophy

§ 4 Becoming an effective ZBA member begins with a clear philosophy of your approach to the task. Perhaps you had a desire to give something back to the community, or something happened in your neighborhood that disturbed you or you wanted to help people. Most likely, you did not get into the job for the money (you did volunteer, after all).

Regardless of why you decided to accept the appointment, to be an effective member, your participation will require a serious commitment of time and energy, and a serious commitment to the laws governing the decisions of the ZBA.

It may help to understand why the job of the zoning board of appeals was created in the first place.

What is a zoning board of appeals?

§ 5 Early in the history of zoning it was recognized that it was nearly impossible to write a set of regulations affecting the development of land that could be universally applied. Many communities in Michigan and throughout the country had hundreds or thousands of parcels of land to which zoning standards had to be applied. As a result, it was clear that a means of providing relief from

the strict requirements of the zoning ordinance was needed for property owners with unique conditions related to their property.

To provide an avenue of appeal, each state's zoning enabling acts required that any community which adopted a zoning ordinance have a zoning board of appeals. The function of the ZBA was to be a quasi-judicial body, to carry out two principal functions:

1. To hear and decide appeals of administrative decisions made in implementing the zoning ordinance; and
2. To hear and decide requests for variances from the strict terms of the zoning ordinance. In addition, the ZBA is occasionally called upon to interpret the provisions of the zoning ordinance.

The Role of the ZBA

§ 6 As a member of the zoning board of appeals, you will be dealing with one of the most enduring elements of society – land. Decisions based on the land nearly always last forever because they are in place regardless of the owner. Therefore, your decisions can have a serious effect on the use and value of land.

At the same time, you will be dealing with people, both applicants and neighbors affected by your decisions. You will find that this can create

uniquely challenging situations. Consequently, your actions must be based on the long-term interests of the community which, in turn, must be guided by the decision-making standards of the zoning ordinance.

Every person who can meet the criteria for relief has the right to seek relief from a zoning ordinance requirement. If the standards used by the ZBA are carefully considered and followed, the integrity of the ordinance should be maintained. However, not following such standards leads to problems. Too often variances are granted simply because no one sees any harm. The ZBA soon gains a reputation for not following its ordinance. One merely has to go to the zoning board of appeals to obtain relief from the ordinance – getting a variance is no problem.

Eventually, the offhand granting of variances harms the community's ability to enforce the ordinance. Moreover, poorly supported decisions can, over time, destroy the credibility of the zoning ordinance. It is up to the members of the zoning board of appeals to prevent this by strictly applying the standards of the ordinance.

These decisions will not always be easy. In some instances, you will know the land owners, neighbors or applicants personally. The key to acting in a responsible manner is to act in ways that will allow you to treat each person and property in a fair and consistent manner.

Chapter 1

The Basics

§ 7 In the Introduction we noted that being an effective ZBA member begins with a clear understanding of the job and each member's approach to it. Two important aspects with which you should be familiar are the legal basis for the zoning board of appeals and the relationship between the ZBA and other bodies and officials dealing with the zoning process.

The Zoning Enabling Acts

§ 8 All zoning authority is granted by the state through the new Michigan Zoning Enabling Act, (PA 110 of 2006). Counties that have adopted a

zoning ordinance have zoning authority over townships (but not over cities or villages) which do not have their own zoning ordinance. Cities, villages and townships that have their own zoning ordinances do not fall under county authority.

The zoning enabling act defines the membership, responsibilities and authority of the ZBA. It also describes general rules for the formation and operation of a zoning board of appeals. The chart on the following page outlines some of the differences in the organization of the ZBA at various levels of government.

	Community
Number of members	Less than 5,000 population - not less than 3 members
	5,000 or more population - not less than 5 members
Membership	Planning commission member must be on the ZBA; elected official may be on ZBA. In cities and villages the elected body may act as the ZBA.

Zoning Act

Michigan Zoning Enabling Act

2006 PA 110

MCL 125.3101 et seq.

[Michigan Zoning Enabling Act](#)

officers and their duties, quorum rules, special meeting procedures, conflict of interest procedures, and other aspects of the ZBA's operation. Bylaws are not part of the zoning ordinance but are adopted by the ZBA as its rules for operation.

Membership

§ 9 Qualifications for membership are generally minimal. Members are only required to be an elector and be representative of the population distribution and the "various interests present" in the community."

Although less common, but still practiced, legislative bodies may also act as the ZBA, but only in cities and villages. In townships, an elected official may be a member of the ZBA, but cannot be the chair.

In addition to regular members, up to two alternates may be appointed to the ZBA. Alternates serve in the event of a declared conflict of interest or absence of a regular member. When called, alternates serve until the application(s) is resolved. In the case of an absence, the alternate stays with the cases heard even if the absent member returns.

Bylaws

§ 10 The enabling act also permits the zoning board of appeals to adopt rules governing their operation, commonly referred to as bylaws. The bylaws should specify certain responsibilities, such as defining

Relationship to Other Bodies/Individuals

§ 11 It is also important to understand the relationship between the zoning board of appeals and others with responsibility in the zoning process. Zoning responsibilities are divided between several individuals and bodies.

Planning Acts

Township Planning Act

1959 Public Act 168, as amended;
MCL 125.321 et seq.

Municipal Planning Act

1931 Michigan Public Act 285, as amended; MCL 125.31 et seq.

Purpose: To provide for formation of planning commissions and requirements for making and adopting a master plan for the community.

The Planning Commission

§ 12 The planning commission is given the responsibility of writing and, usually, adopting the master plan, which is intended to serve as a guide for the future development of the community. The plan is used to indicate locations for new

development where natural features and the environment are not at risk, where community character will not be diminished, and where expenses for new roads and services will be at a minimum. It is essential that any action related to zoning, including those actions taken by the zoning board of appeals, should take into consideration the master plan.

The planning commission is also responsible for writing and recommending a zoning ordinance and any subsequent amendments. Local control of the use of land (with some exceptions, such as some state land uses and federal land uses) is an accepted legal principle. Land use is controlled through the separation of land into various use areas, called zoning districts. The rules governing these districts are found in the zoning ordinance, which contains provisions controlling the type and intensity of development allowed.

The zoning ordinance should be established and amended as guided by the master plan. The future land use classifications of the ordinance's zoning districts are depicted on the zoning map that is part of the ordinance. The density and intensity planned for the land use districts are translated to the uses permitted, lot sizes and other regulations.

The courts of the State of Michigan do not recognize the master plan as authorizing land uses on its own. This authorization is contained in the

zoning ordinance. However, the courts do lend much more credibility to land use actions supported by careful planning than those actions that appear to have been taken arbitrarily against an individual property owner.

The Legislative Body

§ 13 The elected governing body of the community has several responsibilities related to the zoning board of appeals. First, and most obvious, the members of the ZBA are appointed or approved by them, unless the legislative body itself decides to act as the ZBA (cities and villages only). Second, the legislative body is responsible for providing the funds necessary for the operation of the ZBA. This includes per diem (or per meeting) payments to members and other expenses such as mileage for site visits, attendance at conferences and training sessions, educational materials and other costs associated with the ZBA.

Finally, the legislative body has the authority to adopt the zoning ordinance and any subsequent amendments, based on a recommendation from the planning commission. Ultimately, the legislative body decides what zoning regulations and policies will be adopted and followed by the community.

It is especially important for the ZBA to recognize its role in relation to the planning commission and legislative

body, particularly with respect to the writing and adoption of the master plan and zoning ordinance. There is no formal process for the zoning board of appeals to play an advisory role in determining planning policies or zoning regulations. Accordingly, it is not the role of the ZBA to attempt to change those regulations or policies through their actions. This, of course, does not prevent the ZBA from communicating their thoughts regarding the ordinance during the course of performing its functions.

The Zoning Administrator

§ 14 The zoning administrator is the individual responsible for the day-to-day administration and enforcement of the zoning ordinance. In many communities the zoning administrator is a valuable contact between the ZBA and the applicant, ensuring that all relevant materials are provided, offering advice in filling out application forms, and advising the ZBA on important factual matters pertaining to the requests before them. In some communities the administrator is asked to provide written, advisory recommendations regarding applications.

In communities where staff or other assistance is available, some of the roles filled by the zoning administrator, including submission of recommendations, may be complemented or completed by these other individuals.

Duties and Responsibilities of the Zoning Board of Appeals

§ 15 The zoning board of appeals exercises three basic roles or functions. These include:

- a) Interpreting the ordinance (text and map)
- b) Deciding appeals from administrative decisions
- c) Granting variances (use and non-use).

The terms *appeal* and *variance* are often used interchangeably, but in fact are two entirely different concepts.

- A **variance**, if granted, allows a departure from a particular requirement of the zoning ordinance.
- An **appeal** is based on the fact that someone has made a decision related to the zoning ordinance, and another person disagrees with that decision.

Conflicts of Interest

§ 16 Knowing about conflicts of interest is important since the zoning act requires the use of an alternate when a member has a conflict. In some instances, failure to declare a conflict of interest may result in the removal of a ZBA member.

What Constitutes a Conflict of Interest?

§ 17 You probably have a conflict of interest if:

- you are the applicant;
- a close relative is the applicant;
- a business associate, lender or renter is the applicant;
- the proposal could allow you or a business associate to receive a financial gain or benefit;
- you are a planning commission representative to the zoning board of appeals and the matter to be heard is an appeal from a previous planning commission decision in which you participated; or

If you have to ask... chances are others are asking as well. If you are in doubt about whether or not you have a conflict, it is often advisable to take a conservative approach and declare a conflict. This helps to avoid a public appearance of unfairness.

You may also consider the possibility of declaring a conflict of interest if

your home falls within a notification radius used by your community for zoning board of appeals' actions. Since the sending of the notice automatically presumes some degree of interest, this fact should be recognized by declaring a conflict, particularly if a financial impact is likely.

Ultimately, the declaration of a conflict of interest becomes a personal issue and one that should be honored by the other members. If in doubt about whether a conflict of interest is present, it will generally be better to avoid the perception of a conflict, even though an individual member may conclude that a conflict does not exist.

What To Do

§ 18 In order to maintain public trust and insure fairness, it is important to follow some simple steps if a conflict is present. The ZBA bylaws should address fully those actions to be taken in the event of a conflict of interest. Suggested actions are:

1. Declare the apparent conflict of interest. If a member is aware of a conflict prior to the meeting, the staff/chair should be notified in order to allow an alternate to be called. If an alternate is called in, he or she serves on that case until it is completed.
2. Generally, voting by the other members on a conflict of interest

is not necessary. However, if the ZBA adheres strictly to Robert's Rules of Order for all meeting procedures (not just conflicts), members should be excused through a vote. However, declaring a conflict of interest should not be used as a means of avoiding a difficult or uncomfortable decision.

3. Abstain from voting and do not participate in deliberations, either as a member of the ZBA, or as a "citizen." Although no one can be prohibited from speaking as a "citizen," the comments from a fellow ZBA member will likely be viewed by the audience as being very influential and have the appearance of bias. This does not prevent the member from being represented by an attorney, family member or friend.
4. Once the conflict is declared, you may wish (but have no obligation) to leave the room. This will be a clear indication to the audience that the member has no part in the deliberation or decision, and it avoids any perception by the audience that the member is attempting to influence the others. By all means, the member with a conflict should vacate his or her seat during all proceedings involving the case.

Some Don'ts

- § 19** if you have a conflict of interest,
- Don't discuss the proposal, either formally or informally with any of the other members.
 - Don't use inside knowledge and contacts. Make sure that minutes, staff materials, etc., are obtained through the same procedures as any other applicant. It is best to have someone else collect this information.
 - Don't represent yourself if you are the applicant. Have someone else perform that function. It is acceptable to have other family members, an attorney or a personal representative speak for the member.

Interpretations

§ 20 The ZBA is authorized to issue an official interpretation of the zoning ordinance. Interpretations may be related to either the text of the zoning ordinance or to the boundaries of the zoning map. Unlike legal opinions or recommendations of consultants, an interpretation by the ZBA establishes the meaning of the matter being interpreted and is deemed to be the actual meaning of the ordinance from that point forward, unless the ZBA's interpretation is appealed to the courts.

Several rules of thumb may help in making interpretations.

- a) Base map interpretations on the zoning ordinance itself and any relevant historical information. Commonly, these rules are of the “walk like a duck” variety. In other words, if it appears as though the zoning boundary follows a river, it should be assumed to follow the river, or a road right-of-way, or some other physical feature. Where the boundary is unclear, the ZBA should take into account past zoning history (if any) and the potential effect of a determination on surrounding properties.
- b) Interpret the text of the zoning ordinance based on a thorough reading of the ordinance in order not to have the effect of amending the ordinance.
- c) Give weight to reasonable practical interpretations by administrative officials if applied consistently over a long period of time.
- d) Keep records of all interpretations. Once an interpretation is rendered, it is the official position of the community as to that provision. Consistency in decision making is important for the long-term.
- e) Generally, if equally convincing points are put forth by the zoning administrator and an individual affected by an interpretation, fairness dictates that the person most affected by the interpretation should prevail. In other words, where two interpretations are

reasonably equal, the benefit of the doubt should be given to the property owner rather than the zoning administrator.

Once an interpretation is made, it is advisable for the planning commission to review the matter to determine whether or not an amendment to the ordinance is needed to further clarify the language (for a text interpretation), or to review the zoning map to determine a specific location of a zoning boundary (for a map interpretation).

Appeals

§ 21 The zoning board of appeals is empowered to hear and decide appeals from any person aggrieved by an administrative decision. An administrative decision is one made by a zoning administrator or the planning commission, or by the legislative body when they are acting in an administrative capacity, (if, for example, the legislative body approved all site plans). Most often, appeals are the result of a disagreement with a decision of the zoning administrator, or, in some cases, a person aggrieved by a site plan review decision by the planning commission. Appeals may be required to be filed within a specific time period set in the zoning ordinance.

The ZBA cannot hear two types of zoning decisions. The first is an amendment to the zoning ordinance

(rezoning or text change) – this is reserved for the legislative body. The second type of decision is for special land uses and planned unit developments, which can only be heard by the ZBA if the zoning ordinance specifically allows for an appeal.

Although the ZBA may reverse or affirm, wholly or partly, or may modify a prior decision, its powers are generally limited to determining whether or not the official or body making the administrative decision acted properly. The ZBA must recognize that the zoning administrator or planning commission has already made a decision regarding the issue as part of its delegated duties. The role of the ZBA is to determine whether the decision was authorized or supported by the zoning ordinance.

In addition, the ZBA should not treat the appeal as a new decision. Rather, review of the decision should be limited to the information that was available to the body or person who made the decision initially. Allowing testimony or evidence in addition to that previously submitted is inappropriate, unless the zoning ordinance directs otherwise.

In those instances where the official or body used proper procedures and standards, the ZBA should uphold the decision, even if the members personally disagree with the result.

Some communities attempt to make appeals and variances the same by allowing an application to the zoning board of appeals only after the denial of a requested permit, such as a building permit or zoning compliance permit. This can be an inefficient and cumbersome procedure since a permit application may require submission of a full application for the permit, even when it is obvious that some requirement of the zoning ordinance is not met and a variance will be needed before a permit can be issued.

Variations

§ 22 A variance grants permission to depart from a requirement or limitation of the zoning ordinance. There are two types of variances:

- a) Nonuse variances (dimensional variances)
- b) Use variances

Nonuse or Dimensional Variations

§ 23 A nonuse variance, also known as a dimensional variance, is a modification of a provision or requirement of the zoning ordinance authorized by the zoning board of appeals when the strict or literal application of the ordinance would cause “practical difficulties” for the applicant. Nonuse variance requests are typically associated with modifications of required yard setbacks, building heights, parking

requirements, landscaping or buffering restrictions and related building or facility placement provisions.

To obtain a nonuse variance, the applicant must show that a *practical difficulty* exists on the property by demonstrating that the applicable review standards are met. A detailed examination of these standards is provided in Chapter 3.

Use Variances

§ 24 A use variance allows a use of land that is not permitted in the district in which the property is placed. Granting of a use variance requires that the applicant demonstrate that an “unnecessary hardship” would be imposed if the owner cannot use the property as requested.

Use variances are permitted in cities and villages but limited in townships and counties. According to the Michigan Zoning Enabling Act only the following townships and counties are eligible to hear use variances:

1. Those that as of February 15, 2006 had an ordinance that used the phrase "use variance" or "variances from uses of land" to expressly authorize the granting of use variances; and
2. Those that granted a use variance before February 15, 2006.

However, even if permitted and eligible to hear use variances, the Zoning Enabling Act allows community opt out of this procedure.

To prohibit use variances the community must adopt zoning ordinance language that prohibits submission of use variance requests.

From a community planning perspective, the indiscriminate granting of use variances is a poor zoning and planning practice. Given the long-term implications, it is important that the ZBA understand the ultimate effects of use variances on the master plan or zoning plan for the community. Approval of a use variance can change the overall land use character of a particular area. That is why strict attention to the use variance standards is necessary.

Following the Rules

§ 25 It is especially important that the zoning board of appeals establish a consistent method of processing applications, conducting meetings and handling other procedures. As noted earlier, the ZBA should have a set of written procedures, or bylaws, for those rules of operation not covered in the zoning ordinance.

Some common considerations follow.

- Incomplete applications (inadequate site plan, fee unpaid, etc.) should not be accepted, i.e.,

should not be placed on an agenda.

- If public notice was not properly completed, the process must be stopped and a new process begun using a correct notice as to form, content and publication.
- Action should not be taken on any application unless the applicant or a representative is present (unless legal time limits dictate otherwise).

Conclusion

§ 26 Variances are not intended to relieve requirements of the zoning ordinance that are simply preventing applicants from doing what they wish.

Instead, the zoning board of appeals was intended to serve as a safety valve in those relatively rare circumstances where the application of the zoning requirements results in a practical difficulty (for nonuse variances) or unnecessary hardship (for use variances). However, variances approved without sufficient justification can turn the safety valve into a leak. Eventually, this will erode the overall purpose and effectiveness of the zoning ordinance, particularly when it is commonly known that the ZBA is likely to approve virtually any request.

Chapter 2

Preparing for and Conducting Meetings

§ 27 Membership on the zoning board of appeals can mean either just showing up for the meeting or being prepared to make informed decisions. While it is difficult to ask a volunteer to put forth an extra effort, your agreement to serve is also a commitment to do the best possible job for your community.

It is difficult for any member of the ZBA to reach a fair and impartial result without a firm base of knowledge about the matters on which he or she is asked to decide. To gain this knowledge, you will need assistance from the community's staff, the applicant and each member. There are some positive "fact finding" steps you can take to make sure you are ready to make the best possible decision.

Information

§ 28 In order to prepare properly for a meeting, you must review all available and relevant information. At a minimum, this will include copies of applications, site plans and other supporting material. This material should reach you early enough to allow adequate time to study and

prepare, normally, at least one week before the meeting.

Public Hearing Notices

§ 29 A public hearing is required for all ZBA approvals (variances, interpretations, and appeals). The notices differ slightly.

For variances a notice of the request must be published in a newspaper of general circulation.

Notice shall also be sent by mail or personal delivery to the owners of property for which approval is being considered, to all persons to whom real property is assessed within 300 feet of the property, and to the occupants of all structures within 300 feet of the property regardless of whether the property or occupant is located in the community. If the name of the occupant is not known, the term "occupant" may be used in making notification.

The notice shall be given not less than 15 days before the date the application will be considered for approval. The notice shall do all of the following:

(a) Describe the nature of the request.

(b) Indicate the property that is the subject of the request. The notice shall include a listing of all existing street

addresses within the property. Street addresses do not need to be created and listed if no such addresses currently exist within the property. If there are no street addresses, other means of identification may be used.

c) State when and where the request will be considered.

(d) Indicate when and where written comments will be received concerning the request.

Public hearings for interpretations and appeals are the same, except that notices to individual property owners other than the applicant is necessary only if a specific property is involved in the interpretation or appeal.

Site Visits

§ 30 Visiting the site is a critical step in the decision making process. Even if you have lived in the community all your life, a site will look different to you when a specific request is made. Prior to the site visit you should review any site plans or sketches submitted as part of the application. This review will allow you to gain a proper perspective on the request and how it relates to surrounding properties and to the standards of review you are required to use to reach your decision.

Some precautions must be taken when doing site visits. First, all such visits should always be made individually rather than as a group. Meeting on site (even with less than a quorum) presents several potential problems.

- A site visit by a majority of the membership of a decision making body is a “meeting,” and must be advertised in accordance with the Michigan Open Meetings Act, MCL 15.261 et seq., and the requirements of the Americans With Disabilities Act (ADA) must be met.
- Practically, it is hard for the visiting members to avoid talking among themselves about the proposal. Such discussions can violate the spirit as well as the letter of the Open Meetings Act.

The Michigan Open Meetings Act, MCL 15.261 et seq., was intended to make sure that the decision making process followed by government bodies always takes place under the watchful eye of the public. Even though you can simply meet the *letter* of the act, it is just as important that the *spirit* of open meetings be observed. *Don't look for ways around the act; look for ways you can make it work better.*

Second, do not go onto the site unless the property owner has granted specific written permission or unless the site is otherwise available to the public (such as an existing shopping center). Verbal approvals should not be relied upon as sufficient permission. Written permission helps avoid misunderstandings and problems with trespassing accusations.

Refusal by the applicant to allow you on the site can not influence your decision. Many people are concerned about liability or are simply determined to protect their privacy.

If permission has not been granted and you feel as though your decision cannot be made without viewing the site, look for other ways to get the same information. This might include aerial photos or surveys. You may also request that the applicant submit photographs, slides or video tape particularly for larger, inaccessible sites. This information may be available from community staff or you may ask for it from the applicant. There are many ways to gather the necessary information and you should not make a decision until it is obtained.

TIP: Consider adding a line to your application form that allows the applicant the option to grant permission for the members to conduct a site visit.

You may feel free to request information from the community's staff. Make sure whatever information you receive is also distributed to each of the other members. Similarly, written materials received at home from applicants or others should be provided to the community's staff for distribution to the rest of the members.

Finally, do not talk to the property owner, neighbors or applicant outside

of the meeting. The intent of information gathering is to ensure that everyone has the same information on which to base a decision. This is not possible if individual members contact or are contacted by others outside of the meeting.

If the applicant or others contact you, be prepared to tell them that you are required to conduct all of your discussions only when the other members of the ZBA are present. Encourage them to come to the meeting (tell them when and where) or ask them to submit their comments in writing (tell them to whom and by what date). If contact cannot be avoided, it should be reported to the rest of the members during the meeting, along with the general content of the conversation.

Remember - you are only one person on the ZBA; the only time you should act as a member of the zoning board of appeals is in the presence of the other members at a posted meeting.

Before Leaving Home

§ 31 Make sure you have everything. Follow this checklist.

1. Do you have your zoning ordinance and other applicable ordinances, if any?
2. Have you examined the agenda and related materials?
3. Have you written down your questions?

4. Have you completed the site visit? If not, at least drive by the site on the way to the meeting.
5. Have you reviewed the standards that will be used for each decision?
6. Remind yourself that the purpose of preparing for the meeting is not to **make** a decision; it is only to gather the information needed to **prepare** you for the decision that is to come.

Meeting the Public

§ 32 Land use issues, as you will no doubt discover, can bring out strong emotions. Faced with a roomful of angry and concerned people, you may sometimes find it difficult to maintain the decorum and professionalism needed. Although many zoning boards of appeal follow Robert's Rules of Order in one form or another, there are other, more subtle aspects that, while not unique to zoning, nevertheless are important.

Being Fair

§ 33 The foremost concern of any member of a public body should be to ensure fairness for all concerned. To accomplish this, it is helpful to keep some simple things in mind.

- Everyone must have the opportunity to speak and present evidence at public hearings. While some limitations may be placed on this right, as described later, no action should be taken that would

deprive a person of his or her right to be heard within the confines of applicable rules of procedure.

- Recognize emotional responses and treat them with concern and understanding. Strong responses, within limits, should be expected and understood. Controlling your own emotions is essential, even if the comments get personal.
- One of mankind's greatest fears is public speaking. Make an effort to look beyond the mannerisms and nervousness to find the speaker's message.
- Regardless of how many people show up to oppose or support a request, you must represent the long term interests of the entire community, not just those at the public hearing. Further discussion of this issue is presented later in this chapter.
- Listen. Public meetings are your chance to take the pulse of the community and to learn more about the neighborhood in which a request is pending. Take advantage of the efforts that those attending the meeting have made and learn as much as you can.

Follow the Rules

§ 34 Playing fair means playing by the rules. Having an effective set of meeting rules helps provide a sense of professionalism and ensures that

meetings are orderly. Rules do not need to be rigid. Nor should they be too confining. Occasionally agendas will need to be altered to take unanticipated events into account.

Keeping a subtle balance between the degree of formality required and the informality that is sometimes needed is a learned art. For example, applicants should not be called by their first names. Doing so gives the impression of favoritism, that the person is “connected” in the community. Hearing rules should be made a part of the bylaws of the ZBA and a summary of those rules printed on the back of the meeting agenda so that everyone is aware of them.

Rules for Speakers

§ 35 You will soon learn that people do not often come to a meeting in support of a particular project. Most people have concerns they wish to address, while others are simply opposed to change in their neighborhood. Having meeting rules for speakers are especially valuable when there are many people who wish to speak. Without a few basic rules (which should be approved by vote of the ZBA) it would be easy for one or two people to dominate the meeting, thus depriving others of the chance to speak their minds.

- **Direct comments to the chair.** This rule can help avoid debates between members of the audience, between the presenter and the

audience, and between ZBA members and the audience or presenter. It also helps ensure that the chair controls the meeting.

- **Limit speaking time, when necessary.** If there are many people who wish to speak, it is appropriate to limit the time of each speaker to 3-5 minutes, with the exception of the applicant. The applicant should be given as much time as needed, within reason, to present his or her case. During the public comment period, the applicant may wish to respond to individual issues or questions raised. It is generally best to ask that the applicant respond to (or rebut) those questions after all comments have been received.
- **Limit the number of times one person may speak.** Generally, each person needs to be given only a single opportunity to speak. At the discretion of the chair, persons may be allowed to speak a second time to respond to earlier comments. However, the chair should emphasize that repeat comments are not desired. Your rules may also require a sign-up sheet for those persons wishing to speak, with the chair only recognizing those who have signed the sheet.
- **The chair may also ask if there is a spokesperson for the audience,** and ask that the spokesperson speak for others

present who agree with his or her point of view. The chair should allow those for whom the spokesperson is speaking to be recognized, either through a show of hands or by standing. The spokesperson may be given additional time in recognition of his or her role.

- **After the public hearing is closed, it should remain closed.** Further comments should not be accepted unless specifically requested by a member of the ZBA.

And the Applause Meter Says . . .

§ 36 Zoning cannot be a popularity contest, decided by a show of hands in the audience or names on a petition. Many zoning approvals require public input, usually in the form of a hearing. The dilemma in which most decision makers find themselves is trying to determine what weight to give public comments and complaints.

It will quickly be obvious to you that most people do not generally come to a meeting in support of a particular project. Most have concerns they wish addressed or they may simply oppose any development. Some may come to complain about things having little or nothing to do with the issue at hand.

While public input is a valuable part of decision making, the ZBA cannot

simply mirror the wishes of those who come to the meeting or send letters. Your job is to follow the standards and requirements of the zoning ordinance. You are obligated to protect the interests of the applicant, those having a direct interest, and the entire community, not simply the desires of those who happen to attend the meeting.

If it were simply a matter of counting hands in the audience, only one ZBA member would be needed to count the votes or read the applause meter. Simply because a roomful of people shows up to oppose a project, this is not a reason for denial. Similarly, petitions, letters and other written expressions of concern are useful, but only to the point where they provide relevant information.

Ultimately, the role of the public is to provide information to the decision maker. The public can provide a unique perspective on an issue, which may create the need for further study by the community or identify additional information to be provided by the applicant.

Making everyone happy in most cases is impossible, and probably shouldn't be tried. One of the most difficult aspects of planning and zoning is the need to balance the various, often competing, interests of property owners and residents. Michigan law dictates that the public has a legitimate interest in maintaining the important health,

safety and welfare aspects of their neighborhood and in having their property values protected.

“*My home is my castle*” is not an idle remark. Those who follow the NIMBY and BANANA principles sometimes represent this view. The *NIMBYs* believe that the project is well designed, and needed, but located in the wrong place. **Not In My Back Yard** is their battle cry.

Others may believe that the project should not be built anywhere in their community, or perhaps anywhere at all. Their motto is **Build Absolutely Nothing Anywhere Near Anything - BANANA**.

On the other hand, we are also told that owners of property have a right to a reasonable return on their investment and that zoning cannot unreasonably deprive the owners of that return.

Satisfying all of these conflicting views is simply not possible. The intent of zoning is to avoid the necessity of trying to judge between them. Instead, zoning decisions should treat each person, property, and point of view in a fair and consistent manner. It is not the responsibility of the ZBA to create zoning classifications for rezoning property. Rather, the ZBA must merely determine whether, after considering all evidence presented, the applicant has satisfied the necessary level of proofs for the

particular case in order to be entitled to relief.

Rules for ZBA Members

§ 37 As members of a public body, you should follow the same set of rules when presenting yourselves to the public.

- **All comments should be directed through the chair.** Just as the audience must be recognized by the chair, so too should the members. Not only does this respect the role of the chair, it also sets an example for the audience to follow.
- **All deliberations should be in the open.** This is a strict legal requirement. It is important that the citizens view the zoning board of appeals as an open, fair and deliberative body. Remember, people are generally suspicious of government. Don't add substance to that perception.
- **Stay in the public eye.** Do not hold private conferences prior to meeting. Don't meet in a group in a small room or other place outside the meeting chamber. When arriving at the meeting, stay in the chamber. While socializing is acceptable, make sure the citizens do not get the wrong impression.
- **Speak up.** Make all of your comments aloud during the deliberations. If you have a

question, ask the applicant or the chair, rather than your neighbor. Don't allow yourself to be caught up in private discussions with other members. Make all of your comments loudly enough so everyone can hear.

- **Express your opinions.** Don't just vote without letting everyone know why you are voting, whether for or against the issue. Your comments may help others decide (or change their vote). It also lets the applicant and the audience know the strengths or weaknesses of the proposal. Moreover, it may add to the record if the case goes to court.
- **Do not always attempt to answer every question.** Some comments cannot be answered and may be asked just to express frustration. When this happens, calmly try to narrow questions down to specifics. Once you get a handle on the real problem, you may be able to suggest a solution.

It is also important that neither the chair nor members of the ZBA attempt to answer questions from audience members that are better answered by the applicant.

- **If things get out of hand, take a recess.** Long evenings and emotional topics can make for short tempers. A breather may be helpful.

- **Do not feel compelled to make a hasty decision** the night of the hearing. Everyone should feel comfortable with his or her vote. If he or she does not, obtain whatever additional information is needed before proceeding with the decision.
- **Always use the review standards of the zoning ordinance.** The standards are your guarantee of reaching fair, consistent and reasonable decisions. Failing to follow the standards of review can easily lead to discriminatory, subjective and inconsistent decisions.

The Experts Say . . .

§ 38 The question may also arise about how much influence staff reports and opinions should have on a decision. In most cases, staff members are trained in their various fields and are providing their professional opinion. Consequently, their advice and direction are likely to be useful and should be taken seriously. However, that advice and direction should be supported by the facts and by application of the ordinance standards just as the ZBA's decisions are expected to be. The professional's opinions of how the facts relate to the standards may differ from the ZBA's. But ultimately, it is the decision of the zoning board of appeals that will stand.

Keeper of the Gavel

§ 39 The chair is entrusted with enforcing meeting rules. Having a strong chair is important both to the operation of the ZBA and to public's perception of their professionalism. The role of the chair is to maintain order throughout the meeting. The chair should announce each agenda item and note the rules that apply to the hearing. During the meeting, the chair should ensure that courtesy is maintained and that speakers are not interrupted.

Keeping Faith with the Public

§ 40 Too often people feel that government works against them rather than in their best interests. While you will not always be able to satisfy everyone, you can make sure that the public knows that they have been heard and that you are acting responsibly. Following rules of fairness, preparing for meetings and making effective decisions can affirm the confidence placed in you by those who appointed you and those whom you serve.

Making Your Decisions Stick

§ 41 It won't matter how much attention is paid to the principles of the previous chapters if the decisions made are not properly documented. New members may have a tendency to rely on those who have the most experience to remember past actions. There is no doubt that their memories

are valuable, but their recall may not be complete. The only reliable method of documenting actions is the written word and exhibits.

Meeting Minutes

§ 42 In smaller communities, keeping minutes may be one of the least glamorous parts of building a written record. The task of keeping minutes should be taken seriously. There are no firm rules or formats for minutes, but there are some basic principles. As a minimum, section 9 of the Open Meetings Act, MCL 15.269, requires the minutes to show the date, time, place, members present, members absent, any decisions made and all roll call votes taken. In general, minutes should contain enough detail so that a person not present can understand:

- What matters were discussed (the nature of the request, applicant, location);
- Receipt of any correspondence or other communications on the matter (including name and address, if known, and general content);
- Who spoke at the meeting and the general content of his or her comments (including name and address);
- What action was taken by the ZBA (including the motion, vote and any

conditions attached to approved applications); and

- Why an action was taken and how the standards of review of the zoning ordinance were or were not met, i.e., the detailed findings that support the decision.

One of the reasons that minutes are especially important has to do with the appeal procedure that occurs once the ZBA has made its decision. As noted earlier, there are no other levels of review by the community itself after the zoning board of appeals. The next avenue of appeal is to the circuit court of the county in which the property is located.

The zoning enabling act directs the circuit court to decide an appeal on the basis of the record presented by the ZBA and the applicant. In other words, the only information seen by the court will be the written record created at the ZBA hearing. Accordingly, it is essential that the ZBA provide a suitable written record of the proceedings.

Motions

§ 43 One of the important features of documenting decisions is the record of the action taken, as evidenced by the specific motion and vote. There are several essential elements of a motion:

- a maker and seconder;

- a description of the nature of the request;
- the action taken (approval, approval with conditions, denial, postponement of the decision);
- any conditions attached to affirmative decisions; and,
- the reasons for the action taken (the standards of review and how they were or were not satisfied) based upon the facts and evidence presented at the hearing – the findings that support the decision.

Some ZBAs have found it useful to have a blank format to help them word their motions. This can be an effective practice, as long as the motions are not completed prior to the meeting. Having staff or legal counsel prepare a motion or several motions in advance can create the perception that decisions have already been made if a case is highly controversial, and is likely to go to court, there may be a desire to have legal counsel assist in formulating the language of the decision. If such assistance does occur, consideration should be given to seeking such assistance on a decision granting the relief requested as well as a decision denying the relief.

Some hints about motions:

§ 44

- Be sure everyone is clear on the motion by restating it. Do not ask

the person writing the minutes to “clean it up later,” or say, “you know what we want to say.” Take the time to get the wording right. Have the person who is writing down the motion read it back to ensure its accuracy.

- Include specific references to the ordinance’s review standards. If discussion on the issue is thoroughly documented and referenced in the minutes, they may be adequate to represent information related to compliance with the standards of the ordinance. Otherwise, a summary of the discussion on the standards is appropriate.
- Properly stated and supported motions are particularly important. Simply referring to the standards of review is not enough; saying a standard is met doesn’t make it so. A motion that states “this variance is approved (or denied) because it meets (or does not meet) the standards of Section ____” is not sufficient. There must be enough information presented to indicate specifically which standards were or were not met, and the reasons, in terms of the specific facts and evidence presented, the ZBA made the finding.
- Conditions may be imposed on any affirmative decision. Conditions attached to a decision should have a clear purpose: to ensure that the standards used to make the

decision are met. In other words, the condition should strengthen the decision to grant relief. Any condition placed on an approval must have a direct relationship to one or more of the specifications stated in the zoning enabling act for conditions.

One informal way to test the appropriateness of a proposed condition is to review the decision without the condition in place. For example, one of the review standards noted in Chapter 3 is “(T)he variance will not be injurious to the neighborhood or otherwise detrimental to the general welfare.” If, during their deliberations, the board members become concerned that the approval of a variance could have an adverse affect on adjacent properties, a possible condition might be a requirement that a fence or landscaping be installed. If the fence or landscaping were not required, this review standard would not be met. Accordingly, this condition would be an appropriate one to attach to the approval.

- If the motion includes the need for further action, it should state who will be responsible to see that action completed. For example, “the required landscaping shall be reviewed and approved by the zoning administrator.”

Findings of Fact

§ 45 It is worth emphasizing the obligation to make Findings of Fact. Findings of Fact are embodied in a concise statement of the action taken by the members, and include the reasons for the decision, including the specific facts and evidence supporting the decision. In the absence of such findings, it is quite difficult for a reviewing court to sustain the decision of the ZBA.

The Findings, which are part of the minutes, are not official until reviewed and adopted by the ZBA at the next meeting, or certified as approved at the same meeting. One reason this is important is that the applicant or other person disagreeing with the decision has a specific time limit in which to file an appeal to the circuit court (30 days). The clock on the time limit does not begin ticking until the minutes of the meeting at which the action was taken are officially approved.

If the ZBA only meets on demand, or infrequently, another option would be to schedule a meeting after the minutes are completed to review and adopt them.

Post - Decision Documentation

§ 46 Once the decision is made, some administrative steps should be taken to help complete the record. The applicant and secretary of the ZBA should each sign and date 2-3 copies of the site plan or sketch

submitted as part of the application. The applicant should keep one copy and the community at least one other. This provides a record of what was approved and when.

A copy of the minutes should be sent to the applicant following review by the approving bodies along with a letter specifically noting the action taken by the ZBA, including any conditions placed on the approval, if appropriate.

This letter may include further instructions regarding the proposal. For example, if a variance was granted, the letter may state that a site plan approval by the planning commission is necessary prior to issuance of a building permit.

Record Retention

§ 47 The community's records for each application should include, at a minimum:

- Relevant pages of minutes at which the proposal was discussed;
- Staff notes, meeting notes, correspondence, telephone conversation notes, etc.;
- Copy of the application and supporting material;
- Approved/signed copy of the site plan; and
- Follow-up correspondence (as noted above).

If You Build It, We Will Come . . .

§ 48 . . . to make sure it complies with the approvals that were granted. Someone should be given the direct responsibility to make sure that any conditions or changes required by the zoning board of appeals are accomplished. Sending the building official and zoning administrator a copy of the approved application and meeting minutes could help this process.

Remember, building a complete record is important. Should a decision be legally challenged, the written record will provide the background needed to help defend the decision of the ZBA. Also, a suitable record of past actions is needed to ensure that decisions are implemented and that they are enforced over a long period of time. Reliance on someone with a good memory is not enough.

Chapter 3 - Making the Tough Decisions

§ 49 In these days of increasing litigation and public participation, it is not enough to approve or deny an application for a variance or appeal because of a vague notion that the request is or is not a good idea, or that it will hurt the neighborhood, or make things better. If challenged, any decision must have a solid, well-supported foundation.

Decisions related to zoning are rarely easy. And, they are not usually a matter of right or wrong. The duties of the zoning board of appeals require a balancing of the needs of the community and the rights of a private property owner.

- The community has a strong interest in maintaining the integrity of the rules under which zoning operates, through the zoning ordinance. Variances granted without proper foundation can eventually, or even quickly in some cases, lead to a weakening of the ordinance.
- On the other hand, private property owners do have certain rights to use their property and the inappropriate application of the zoning ordinance to that property

should not deprive them of those rights.

Proper decision making starts with the basics: knowledge of the zoning ordinance, knowledge of relevant case facts and using review standards to reach a decision.

Intent and Purpose

A front yard setback variance is being considered by the ZBA. A new member asks, "Why can't the building be built all the way to the property line?"

What would be your answer?

Knowledge of the zoning ordinance

§ 50 While it is not necessary for each member to know the intimate workings and details of a zoning ordinance, they must be familiar with the relevant parts of the ordinance when reviewing applications. But more important, it is essential that each member understands the purpose and need for the regulation being discussed.

One of the standards of review typically applied to variance requests asks that the decision not impair the intent and purpose of the ordinance. If the intent and purpose of the regulation would be materially affected, it is possible that the variance would not be appropriate. For example, one of the recognized purposes of a side yard setback is to provide access for safety personnel to the rear of a building. Should a variance be permitted that eliminates this access, the intent and purpose of the ordinance would not be fulfilled.

Knowledge of Relevant Case Facts

§ 51 Facts are critical to good decision making. Sources of facts include:

- a) The application and supporting materials;
- b) The master plan or other relevant governmental plans;
- c) Staff and agency reports regarding impacts on public services, natural resources, character of the area, traffic and parking, and others;
- d) A visit to the site to see the physical characteristics of the property and adjacent parcels (see Chapter 2) and;
- e) Public hearing comments.

However, what is a fact is not always clear. Sometimes it will be necessary

for the members to use their own experience and common sense (a concept not often applied to zoning).

Use of Ordinance Standards

§ 52 Following an effective and consistent decision making process is one of the most important methods of supporting your decisions. Proper and consistent use of the standards of the zoning ordinance or other ordinances is essential. If all ordinance standards and state law standards are met, the application must be approved. Before any variance should be approved, the applicant should be required to demonstrate that either a practical difficulty or unnecessary hardship exists. While these terms are sometimes used interchangeably, they are, in fact, distinct and different terms.

- **Practical difficulty** is applied only to nonuse, or dimensional variances;
- **Unnecessary hardship** is relevant only for use variances.

The wording and number of standards will often differ from one community to another, but the following standards have been considered by various court decisions and are common to ordinances.

Standards for Nonuse or Dimensional Variances

§ 53 Granting of a nonuse variance requires the existence of a practical

difficulty, which is demonstrated by showing that:

1. *Special or unique conditions and circumstances exist which are peculiar to the land, structure, or building involved and which are not generally applicable to other lands, structures, or buildings in the same district.*

§ 54 Meeting this standard requires the requested variance to be related to the characteristics of the property and not to the personal situation of the applicant. Should a variance be granted because of a perceived special condition related to the applicant, that condition would no longer exist if the applicant leaves the property. But the variance remains with the land.

Similarly, trying to distinguish between individual circumstances related to individuals is nearly impossible. Nearly every person has some situation that may consider unique. You are not expected to be able to draw a line between various applicants' special conditions.

This dilemma cannot be resolved by restricting the approval to a particular individual. Variances, like other zoning approvals, cannot be restricted solely to the benefit of or use by a specific person. Variances, once granted, run with the land, not with the property owner.

Special conditions or circumstances that are related to the property are generally physical characteristics that may normally include:

- exceptional narrowness, shallowness or shape;
- exceptional topographic conditions or other extraordinary situations related to the property; or
- use or development of the property immediately adjoining the property in question.

Also, the characteristics of the property asserted as the basis for relief must not be common among other properties in the same district or vicinity. As with all variances, the principle is that the variance is needed to relieve a practical difficulty caused by the unique conditions present on the land. Common conditions or situations should be addressed by a change in the text of the ordinance, rather than by the granting of individual variance applications.

2. *A literal interpretation of the provisions of this ordinance would deprive the applicant of rights commonly enjoyed by other properties in the same district under the terms of this ordinance; and that the variance is the minimum necessary.*

§ 55 Property owners are given certain rights to use their property within the limits allowed by the zoning

ordinance. If the conditions present on the property are such that owners are deprived of these rights, the zoning board of appeals should find this standard (but not necessarily the variance) in favor of the applicant. However, this does not entitle the applicant to the maximum benefit that might be available. For example, while the ordinance provides that property owners may have accessory buildings, it does not grant the authority to allow any size building desired by the applicant.

This standard also permits the ZBA to modify the request of the applicant to accommodate the special condition or circumstance but only approve the amount of variance that is necessary to do so. For example, an applicant may wish to construct a garage closer to the lot line to avoid a large tree. The ZBA could approve a variance that would miss the tree, but in order to protect an adjoining property, not come as close to the property line as requested.

3. *The special conditions and circumstances do not result from the actions of the applicant.*

§ 56 This standard, often referred to as self-created, is often misunderstood and the subject of differing opinions. There are circumstances when the applicant has clearly taken some action creating a need for the variance. For example, if an applicant splits a lot which previously conformed to the

requirements of the zoning ordinance into two smaller ones, one or both of which then do not meet the ordinance, the action is clearly self-created.

On the other hand, a buyer of a lot that cannot be developed without a variance may ask that the ZBA grant a variance to allow use of the lot. In this case, the applicant did not take an affirmative action by creating the lot. Accordingly, this standard should not be used as a reason for denial (although the variance still must meet the other standards of the ordinance).

4. *The granting of the variance will be in harmony with the general purpose and intent of this ordinance.*

§ 57 While the intent and purpose portion of this standard may sometimes seem like a catchall phrase, it does have meaning. The construction of the zoning ordinance was a carefully considered process that was begun by the planning commission, reviewed by the public and adopted by the legislative body. Each provision of the ordinance has a reason for its existence and it is important that the ZBA understand that reason and not act to impair that purpose.

Whether the ZBA agrees or disagrees with any provision in the ordinance is irrelevant. The ZBA's function is to enforce the provisions of the ordinance, except in very specific

instances where conditions exist that would make compliance with the requirements impractical. Those conditions are defined by the review standards of the ordinance.

It is equally important that the zoning ordinance be reviewed frequently to ensure it is kept current and relevant to today's conditions. This includes making sure that binding court rulings are included and new legislation recognized. Often, an outdated ordinance will tend to generate additional variance requests.

One way the ZBA can help keep the ordinance current is to review its decisions at the end of each year to determine if there are provisions of the ordinance that are consistently being requested for variances. If the review highlights some particular parts of the ordinance, it may be an indication that these provisions need to be updated.

A joint meeting with the planning commission to discuss these provisions will be useful. One of two outcomes is possible. The planning commission may agree that a provision needs updating and begin the actions necessary to amend the ordinance. Or, the commission may determine that the ordinance does not need to be updated and that the provision should remain unchanged. If this is the outcome, the ZBA should respect that decision and only approve variances in those cases

where the standards of review are clearly met.

5. *The variance will not be injurious to the neighborhood or otherwise detrimental to the general welfare.*

§ 58 As with any zoning action, the result of the proposed variance should not be harmful to adjacent properties. Potential harm could be in the form of restricted access or view, noise, lights or any other effect not normally experienced by property owners in similar circumstances.

While the opinions of surrounding property owners are useful, they should not be given absolute weight. The role of the public is not to give their blessing or veto, but to provide the ZBA with information useful to its decision making process. As an illustration, a current adjoining property owner may be a relative or close friend and not object to a variance. But since the variance goes with the land, the next property owners may find themselves with an objectionable situation.

On the other hand, it is appropriate for the ZBA to take the comments of the public into consideration to determine whether or not the variance may adversely affect nearby property or the neighborhood. (See Chapter 2.) Note, however, that simply because a variance is not harmful to the neighborhood does not mean that it meets all of the other applicable standards.

6. The spirit of this ordinance shall be observed, public safety secured and substantial justice done.

§ 59 The concepts of this standard, though broad, are important. Observing the spirit of the ordinance will mean that the ZBA understands the potential effects one or several variances could have on the effectiveness of the zoning ordinance. For example, if the ZBA's reputation is one of easy approvals, applicants are more likely to seek variances in other than special conditions and circumstances.

"Public safety secured" indicates that the variance, if approved, will not create an unsafe condition.

While "substantial justice" directly addresses fairness to the applicant, it also applies to others who might be affected by the variance, such as neighboring property owners. Often the initial expectations of neighbors are that the ZBA will follow the requirements of the zoning ordinance. The substantial justice requirement dictates that the variance should not be granted if it would undermine the purpose and intent of the zoning ordinance as it relates to adjoining properties. This includes a consideration of the extent of variance to be granted. In this context, substantial justice requires the variance to be the minimum necessary to afford relief.

The ZBA's Reputation

A zoning board of appeals known for easy approvals may find itself barraged with variance requests. As the word spreads that the ZBA grants almost any variance, the attitude among builders, attorneys, planners, and others who frequently advise property owners is, "Don't bother trying to meet the zoning ordinance, All you need to do is apply for a variance and you will get it."

Standards for Use Variances

§ 60 As noted in Chapter 1, a use variance allows a use of land that is not permitted in the district in which the property is placed. Because this type of relief is so significant, granting of a use variance requires the existence of an unnecessary hardship, which is demonstrated by showing that:

- 1. The property could not be used (be put to a reasonable use) for the purposes permitted in that zone district.**

§ 61 The principle behind a use variance is that it is necessary because the property is not usable as it is zoned. Therefore, a thorough review is needed to first establish that none of the uses currently allowed in the district, either as permitted by right or through a special land use, are appropriate for the property. While it is true that financial considerations are not generally the subject of review for variances, this standard may be

satisfied by a finding that the property would essentially be valueless if an attempt were made to develop it as zoned.

Part of this review will require determining if the property can be reasonably used for any of the uses permitted in the district. This does not mean that the use has to be the most profitable, or the use proposed by the applicant. It only requires a finding that there is one or more uses permitted in the district which could reasonably be placed on the property.

2. *The plight is due to unique circumstances peculiar to the property and not to general neighborhood conditions.*

§ 62 This standard is generally similar to that for nonuse variances, particularly with respect to the necessity for having unique circumstances that are specific to a property and not related to the applicant's personal situation. The other important aspect is the requirement that the situation on the property not be common in the area. If conditions are common to the area, a use variance would not be appropriate because the area should be reviewed by the planning commission to determine if the zoning for the entire area should be changed. But that is the function of the planning commission and not that of the zoning board of appeals.

3. *The use would not alter the essential character of the area.*

§ 63 Probably the most difficult aspect of this standard is determining what the essential character of an area is, and if the use variance is approved, what effect might the variance have on that character.

What is the "area" affected by a use variance?

The "area" which may be affected by a use variance will depend on the nature of the request and the size of the property that is the subject of the requested use variance. For example, a small residential lot requesting a use variance for an office will affect a smaller area than a request on a large site for an intensive commercial use.

One of the easiest ways to determine the essential character of an area is through a site visit to examine the area and see the various land uses that exist.

In some cases the character may be evidenced simply by the dominance of one land use over any others. In others it may not be as obvious. For example, some areas may have a wide variety of uses, occupying different sizes of lots. Viewing the area may not directly lead to a conclusion as to the character of the area and may require some degree of judgement.

Another way to determine the character of an area and the possible effect of a use variance is to examine the community's master plan. The plan may clearly indicate the existing or intended character of an area. The ZBA may also seek the advice of the planning commission to help interpret the master plan, or to provide guidance when there is no plan or if it is out-of-date. Any opinion of the commission is simply advice, and should be considered only as input to the ZBA's deliberations.

After determining the essential character, the next step is to evaluate whether or not approval of the use variance would alter that character. This decision might hinge on whether or not the proposed use variance may tip the scales in one direction or another. If an area appears to be in transition from a residential to commercial area, for example, a commercial use variance may be appropriate. However, if the specific character of the area is unclear, a use variance may not be appropriate since it could tend to establish a specific character. This type of decision will require the exercise of discretion by members of the ZBA, as assisted by staff and consultants.

4. The problem is not self-created.

§ 64 This standard is essentially the same as that for nonuse variances. If the applicant created a particular situation that made a property essentially unusable as zoned, that

applicant would not be entitled to relief by approval of a use variance. For example, if a property owner subdivides a large, residentially zoned property, leaving a corner lot as an isolated parcel, an argument that the parcel should only be used for nonresidential purposes could fail because the parcel was created by the direct action of the applicant.

5. The other general requirements are met.

§ 65 As in the case of nonuse variances, an applicant must show that the variance meets the state law requirements, that the spirit of the ordinance shall be observed, public safety secured and substantial justice done.

Use Variances and Rezonings - The Paragon Rule

§ 66 Understanding use variances was made more important by a 1996 decision of the Michigan Supreme Court, *Paragon Properties Company v City of Novi*, (452 Mich 568, 550 NW2d 772 (1996)) in which the court required a "final decision" of the municipality. Under the *Paragon* decision, it will not be deemed that a final decision has been rendered by the municipality until the property owner seeks a use variance from the zoning board of appeals. The *Paragon* decision, therefore, requires submission of a use variance application following a rezoning request denial by the legislative body

before any legal disputes may be brought before the court.

The Michigan Zoning Enabling Act allows a community to choose whether or not it wishes to have a use variance procedure in its ordinance. Therefore, if the use variance procedure was not available, the applicant would not have to exhaust this remedy, and *Paragon* would not apply.

Even if provided for by statute, some communities have language in their zoning ordinances that prohibits consideration of use variances. Often this language is in the form of not permitting the zoning board of appeals to hear variances that would have the effect of changing land use or zoning.

For those communities that continue to hear use variances further definition of the meaning of the *Paragon* decision will likely require additional litigation and clarification.

In general, the full effect of this decision has yet to be felt and the interpretation of its language will likely result in some confusion as individual county circuit courts utilize this case.

What about precedents?

§ 67 One of the concerns often expressed by ZBA members is the fear that by approving or not approving a request they may be setting or violating a precedent. This

concern can be real if the ZBA is not using the standards of review of the zoning ordinance. Failure to use these standards consistently requires the ZBA to make up the rules as they go. As a result, future applicants gain the right to be considered by the same considerations used by the ZBA in previous meetings.

Consequently, the way to avoid setting a precedent is to base every decision on the standards of review of the zoning ordinance, and include findings of fact that distinguish cases from one another. When the standards are used and findings made consistently, the ZBA is less likely to be bound by past decisions because the facts of each case are different. On the other hand, where the facts are very similar the same decision should be reached, not because of a precedent but because the same facts were applied against a consistent set of review standards.

Therefore, consistent and faithful use of the review standards for variances allows the ZBA to reach decisions based on the facts of each individual case. This, together with the detailed findings of fact, helps ensure consistency and fair treatment for every applicant by avoiding the "arbitrary and capricious" labels often given to zoning decisions that are not well supported.

As each application is debated, each of the applicable standards should be specifically reviewed and individual

findings made for each. No approvals should be granted until the members clearly agree that all the standards of review are satisfied. Zoning decisions are permanent. Care must be taken to ensure that each decision is well supported. It is essential that the decisions are well documented and that the records pertaining to all applications are complete.

How to Avoid Litigation

§ 68 The short answer to avoiding litigation is simple – you can't! Governments are always open to lawsuits, regardless of the quality of their decisions. Far too often, disappointed applicants or neighbors look to the courts to solve their problems. As a result, the ZBA cannot be overly influenced by threats or concerns about whether a decision will result in a lawsuit, provided, of course, that the ZBA has acted properly and thoroughly supported and documented the decision.

However, there are some actions that can strengthen the ZBA's legal position should any decision be challenged.

- **Follow a standard decision making process.** The zoning process involves a wide variety of technical, administrative and judgmental factors. Making sure that the requirements of the ordinance are followed, including proper notices, use of standards of

review and proper documentation of decisions is a good start.

- **Use review standards and make findings.** The most important step you can take is the proper use of the review standards provided in the zoning ordinance to guide your decisions. These standards outline a clear path to reaching fair and consistent decisions. All decisions must be based on these standards and the facts that are used to apply them. Therefore, apply and make findings on each review standard.
- **Follow proper procedures.** The community should ensure that adequate procedures are in place to ensure that application procedures are clear, notices are properly completed, and adequate records are kept. The ZBA should ensure that proper hearing procedures are followed. This includes creating a suitable record of the actions taken and the reasons for those actions as part of the ZBA minutes.

Index

A

adjacent properties, §58
administrative decision, defined, §21
appeal, defined, §15
appeal, limitations, §21
appeal, new evidence restricted, §21
applications, incomplete, §25

B

bylaws, §10

C

chairman, role of, §38
conflict of interest, consequence, §16
conflict of interest, defined, §17, 18
courts, Michigan, §12

D

dimensional variance, defined, §23
dimensional variances, §53

E

essential character, effect of use variance,
§63

F

facts, sources, §51
fairness, §32
findings of fact, §45
funds, §13

H

hearings, §33, 35
injurious to neighborhood, §58

I

intent, zoning, §36

L

land use, local control, §12
legislative bodies, as zoning board of
appeals, §9
legislative body, authority, §13
legislative body, role, §13
litigation, how to avoid, §68
local control, land use, §12

M

master plan, §63
master plan, defined, §12
meeting the public, conduct, §31
meetings, absence from §9
meetings, minutes, §44
meetings, preparation checklist, §31
meetings, preparing, §28
meetings, public's right to speak, §33, 35
meetings, rules of procedure, §34, 35
meetings, time limit for speakers, §35
Michigan Open Meetings Act, §30
Michigan Open Meetings Act, minutes, §42
Michigan Zoning Enabling Act, §8, 24
minutes, §42
minutes, Michigan Open Meetings Act, §42
motions, §43, 44
municipal staff, influence of, §38

N

nonuse or dimensional variances,
standards, §53
nonuse variance, defined, §23

O

Open Meetings Act, §30
Open Meetings Act, minutes, §42
opinions, of ZBA members, §37
ordinance standards, §52
ordinance, intent and purpose, §50
ordinance, knowledge of, §50
ordinance, spirit of, defined, §59

P

Paragon Properties Co v City of Novi, §66
Paragon Rule, §66
planned unit developments, appeal limit, §21
planning commission acts, §12
planning commission, §12
post-decision documentation, §46
practical difficulty, §52, 53
precedents, §67
public conduct, §32
public notice, §25, 29
public trust, conflict of interest, §18

R

recess, §37
record retention, §47

rezonings, §66
rights, of community, §49
rights, of property owners, §49, 55
Roberts Rules of Order, §32
rules for speakers, §35
rules for ZBA members, §37
rules of operation, §10
rules of procedure, meetings, §34, 35

S

self-created conditions, §56
self-created problem, §64
site visits, §30
site visits, alternatives, §30
site visits, permission, §30
site visits, precautions, §30
site visits, refusal, §30
site visits, trespassing, §30
speakers, rules, §35
special conditions related to property, §54
special land uses, appeal limit, §21
spirit of ordinance, defined, §59
standards of review, §37, 44, 48
standards, §52
substantial justice, §59

T

time limit for speakers, §35
trespassing, site visits, §30
trust, of the public, §40

U

unique circumstances, §621
unnecessary hardship, §52, 53
unnecessary hardship, demonstrated, §60
use variance, see also variance
use variance, consideration prohibited by ordinance, §66
use variance, defined, §24, 60
use variance, granting requirements, §24
use variance, long-term implications, §24
use variance, principle behind, §61
use variance, prohibition of requests, §24

V

variance, approval, §52
variance, area affected, §59
variance, commercial use, §63
variance, defined in general, §22
variance, defined, §15
variance, intent, §26

Z

zoning administrator, §14
zoning board of appeals, advisory role, §13
zoning board of appeals, as public body, §37
zoning board of appeals, at different levels of government, §8
zoning board of appeals, defined, §5
zoning board of appeals, function, §5
zoning board of appeals, legal basis, §7
zoning board of appeals, membership, §9
zoning board of appeals, relationships with other bodies and officials, §7, 8, 9, 11, 12, 13, 14
zoning board of appeals, role in appeal, §21
zoning board of appeals, role, §6, 15
zoning board, townships, §2
zoning districts, defined, §12
zoning enabling acts, §5
zoning enabling acts, authority, §8
zoning ordinance, amendments, §12
zoning ordinance, intent and purpose, §50
zoning ordinance, interpretation, §20
zoning ordinance, review of, §57
zoning, intent, §36